

CCR Number: 0019

CRITICALITY: ROUTINE

DUE: 08/12/98

DISTRIBUTION SHEET
EO-1 LEVEL II CCB

Matt Jurotich/EO-1 Payload Manager

Pete Spidaliere/EO-1 Mission Mgr

Nick Speciale/EO-1 Mission Technologist


D.Mandl/ Ops. Mgr/GSFC

Herb Vigg/EO-1/MIT-LL

Leslie Moy/EO-1/Code 923

Jenifer Evans/EO-1/MIT-LL

NEW MILLENNIUM PROJECT CONFIGURATION CHANGE REQUEST

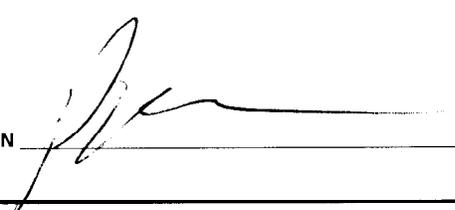PROGRAM <u>EO-1</u> CCR NO. <u>0019</u> DATE INITIATED <u>08/1</u> <u>4/98</u>	TITLE <u>Rev A TO ICD-55 RADIOMETRIC PROC & PERFORMANCE</u> ORIGINATOR <u>LINCOLN LABS</u> ORIGINATOR'S CHG. NO. <u>Lincoln Labs Version 1.5</u> SPONSOR/CODE <u>Leslie Mov/EO-1 Code 923</u> PHONE <u>x8134</u>		
EFFECTIVITY ITEM : <u>EO-1/RC</u> <u>SIN</u> ITEM: <u>S/N</u> ITEM: <u>S/N</u>	CHANGE CLASS PRELIMINARY <input type="checkbox"/> I <input type="checkbox"/> II FORMAL <input type="checkbox"/> I <input type="checkbox"/> II	TYPE OF CHANGE MILESTONE <input type="checkbox"/> INTERFACE <input type="checkbox"/> SOFTWARE <input type="checkbox"/> DOCUMENT <input type="checkbox"/> POWER <input type="checkbox"/> OTHER <input type="checkbox"/> COST - <input type="checkbox"/> WEIGHT <input type="checkbox"/> _____ <input type="checkbox"/>	
DOCUMENTS OR SOFTWARE AFFECTED <u>EO-1 ICD-055 (A)</u>			
PROBLEM <p>The attached Draft Revision A to ICD-55, Radiometric Calibration Processing and Performance Assessment Processing between NASA GSFC and the Massachusetts Institute of Technology (MIT) Lincoln Labs, requires EO-1 project approval. There have been significant changes made since the baseline version of the document was approved and released in April 1998. This version, once approved by EO-1 Project Management, will replace in its entirety, the original baseline version of 4/16/98.</p>			
PROPOSED SOLUTION <p>Approve the attached draft version of ICD-55 Rev A, EO-1 Radiometric and Performance Assessment Processing between GSFC and MIT Lincoln Labs, by the EO-1 Level II Configuration Control Board (CCB). This draft version of Rev A will replace the original baseline version approved in April 1998. Future changes to this ICD will be initiated by submittal of Configuration Change Requests (CCRs) and Preliminary Interface Revision Notices (PIRNs) for CCB approval. This document is maintained by the EO-1 Configuration Management Office (CMO).</p>			
BOARD ACTION APPROVE <input checked="" type="checkbox"/> APPROVE WITH CHANGE <input type="checkbox"/> DISAPPROVE <input type="checkbox"/> WITHDRAW <input type="checkbox"/>	APPROVAL LEVEL REQUIRED LEVEL I HQS <input type="checkbox"/> LEVEL II GSFC <input type="checkbox"/> LEVEL III <input type="checkbox"/> C I	CRITICALITY LEVEL EMERGENCY <input type="checkbox"/> URGENT <input type="checkbox"/> ROUTINE <input checked="" type="checkbox"/>	PROCUREMENT CHANGE ORDER CLASSIFICATION ROUTINE <input type="checkbox"/> URGENT <input type="checkbox"/> EMERGENCY <input type="checkbox"/> OPTION 1 <input type="checkbox"/> OPTION 1 <input type="checkbox"/> OPTION 2 <input type="checkbox"/> OPTION 2 <input type="checkbox"/>
COMMENTS <p style="text-align: center;"><i>Approve Rev A draft to ICD 55</i></p> <p style="text-align: center;">  CHAIRPERSON _____ DATE <u>2/20/98</u> </p>			

EO-1 ICD-55
Draft Rev A
August 12, 1998

EARTH OBSERVER 1

INTERFACE CONTROL DOCUMENT

FOR

**RADIOMETRIC CALIBRATION PROCESSING &
PERFORMANCE ASSESSMENT PROCESSING**

BETWEEN

**NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
GODDARD SPACE FLIGHT CENTER**

AND

**THE MASSACHUSETTS INSTITUTE OF TECHNOLOGY
LINCOLN LABORATORY**

Version 1.5
March 20, 1998

EO-1 ICD-55
Draft Rev A
August 12, 1998

INTERFACE CONTROL DOCUMENT
FOR
RADIOMETRIC CALIBRATION PROCESSING &
PERFORMANCE ASSESSMENT PROCESSING
BETWEEN
NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
GODDARD SPACE FLIGHT CENTER
AND
THE MASSACHUSETTS INSTITUTE OF TECHNOLOGY
LINCOLN LABORATORY

APPROVED:

MIT Lincoln Laboratory:

Jenifer B. Evans

Date approved: _____

Herbert E. M. Vigh

Date approved: _____

NASA Goddard Space Flight Center:

Matthew Jurotich

Date approved: _____

Daniel Mandl

Date approved: _____

Change Information Page

List of Effective Pages	
Page Number	Issue
Title page	Baseline
iii through xiii	Baseline
1-1 through 1-3	Baseline
2-1	Baseline
3-1 through 3-3	Baseline
4-1 through 4-55	Baseline
AB-1 through AB-2	Baseline

Revision	Description	Date	Approval
–	Initial Release		4/16/98

Table of Contents

1	Introduction.....	6
1.1	Overview of EO-1/ALI Data Collection	6
1.2	Overview of EO-1/ALI Ground Data Processing.....	7
1.3	Applicable Documents	8
2	Document Coordination.....	8
3	Data Exchange.....	9
3.1	Tape Media Specification.....	9
3.2	Tape Contents.....	9
3.3	Tape Labels	10
3.4	LL Address.....	11
4	Data Product Definitions.....	11
4.1	Level 0 Data Products.....	12
4.1.1	Level 0 Data Processing	12
4.1.2	MS/PAN ALI Port Level 0 Raw Data Files (M1Z – M4Z).....	15
4.1.3	WIS VNIR ALI Port Level 0 Raw Data File (WVZ)	29
4.1.4	WIS SWIR ALI Port Level 0 Raw Data File (WSZ).....	33
4.1.5	GIS VNIR ALI Port Level 0 Raw Data File (GVZ).....	37
4.1.6	GIS SWIR ALI Port Level 0 Raw Data File (GSZ)	41
4.1.7	DCE Housekeeping File (DHZ).....	45
4.1.8	DCE IDL Housekeeping File (IHZ).....	46
4.2	Level 1R Radiometrically Calibrated Data Products	47
4.2.1	MS/PAN ALI Port Level 1R Rad. Calibrated Data Files (M1R – M4R).....	47
4.2.2	WIS VNIR ALI Port Level 1R Rad. Calibrated Data File (WVR).....	60
4.2.3	WIS SWIR ALI Port Level 1R Rad. Calibrated Data File (WSR)	64
4.2.4	GIS VNIR ALI Port Level 1R Rad. Calibrated Data File (GVR)	68
4.2.5	GIS SWIR ALI Port Level 1R Rad. Calibrated Data File (GSR).....	72
4.2.6	Calibration Pipeline Processing Log File (PLR)	76
4.3	Non-Calibration Pipeline Data Files.....	77
4.3.1	Atmospheric Corrector Files (ACZ)	77
4.3.2	Non-DCE Housekeeping File (NHZ).....	79
4.3.3	Ground Processing Data Files (GPZ).....	80
4.3.4	Tape Contents File (TCZ)	81
5	Appendix A	83
6	Abbreviations and Acronyms	84

Table of Figures

Figure 1. Science data flow for the ground data processing for the EO-1.	7
Figure 2. PAN pixel locations.	13
Figure 3. PAN image.	13
Figure 4 MS VNIR pixel locations.	14
Figure 5. MS VNIR single band image.	14
Figure 6. MS SWIR pixel locations.	14
Figure 7. MS SWIR single band image.	15
Figure 8. MS and WIS image parallelepiped	Error! Bookmark not defined.
Figure 9. GIS image parallelepiped.	Error! Bookmark not defined.

1 Introduction

The Earth Observer 1 (EO-1) spacecraft will carry the Advanced Land Imager (ALI) sensor for Earth resources imaging. The ALI will collect data from five types of focal plane arrays and output them on five independent data ports. One array type collects multispectral (MS) and panchromatic (PAN) data which are output on the MS/PAN data port. Two Wedge Imaging Spectrometer (WIS) focal plane arrays cover the visible/near infrared (VNIR) band and the shortwave infrared (SWIR) band. Two Grating Imaging Spectrometer (GIS) focal plane arrays also cover the VNIR and SWIR bands, respectively.

The EO-1 spacecraft will also have an Atmospheric Corrector (AC) instrument that will collect data for use in applying atmospheric corrections to the collected MS/PAN, WIS, and GIS data. Housekeeping telemetry from both the ALI instrument and other spacecraft subsystems will also be collected.

The EO-1 calibration system is designed to ensure a long-term radiometric calibration of 5 percent or better. There are six separate calibration data sources: dark current calibration, solar calibration (with a diffuser), lunar calibration, internal flood lamps for calibration, deep space calibration, and use of known ground reflective surfaces. The Radiometric Calibration Pipeline may use all of these sources or a subset of these sources to convert digital numbers received from the five focal plane arrays to engineering units of radiance.

1.1 Overview of EO-1/ALI Data Collection

The data output by the ALI MS/PAN, WIS VNIR, WIS SWIR, GIS VNIR, and GIS SWIR ports will be collected during data collection events (DCEs), during which one or more ports will be read. A DCE is defined as instrument on to instrument off. All of the focal plane arrays act as two-dimensional push broom arrays so that DCEs can vary in duration. Science DCEs will refer to data collected while looking at the Earth, even if there is a calibration target in the scene on the ground. Calibration DCEs will refer to data collected on the Sun (with a diffuser in place), on the Moon, from internal flood lamps, or from some other calibration source (other than the Earth) for radiometric calibration purposes. Note that all DCEs will contain dark current calibration data collected with the ALI cover closed, which will also be used for radiometric calibration.


The DCE data coming from the ALI ports will be read by the spacecraft's Wideband Advanced Recorder/Processor (WARP). The WARP will store the data in onboard memory for downloading over a ground contact at a later time. Housekeeping data collected during the DCE will also be stored in the WARP, as will AC data. All data

stored in the WARP will be downloaded via the X-band link. Housekeeping data also will be collected between DCEs and stored in the EO-1 spacecraft's command processor and will be downloaded during contacts via the S-band link.

1.2 Overview of EO-1/ALI Ground Data Processing

With the exception of Performance Assessment, all of the data processing will be done by NASA Goddard Space Flight Center (GSFC). The Radiometric Calibration Pipeline will be developed by MIT Lincoln Laboratory (LL) and delivered to GSFC for use during ground data processing. The ground data processing has three major parts: Level Zero Processing (LZP); Level 1R or Radiometric Calibration Pipeline processing; and post-processing, which includes both Performance Assessment and Science Validation Data Facility (SVDF) processing. The data flow between these three major parts is described below and outlined in Figure **Error! Style not defined.-Error! Bookmark not defined..**

Error! Style not defined.-Error! Bookmark not defined.. Science Data Flow for the Ground Data Processing for the EO-1

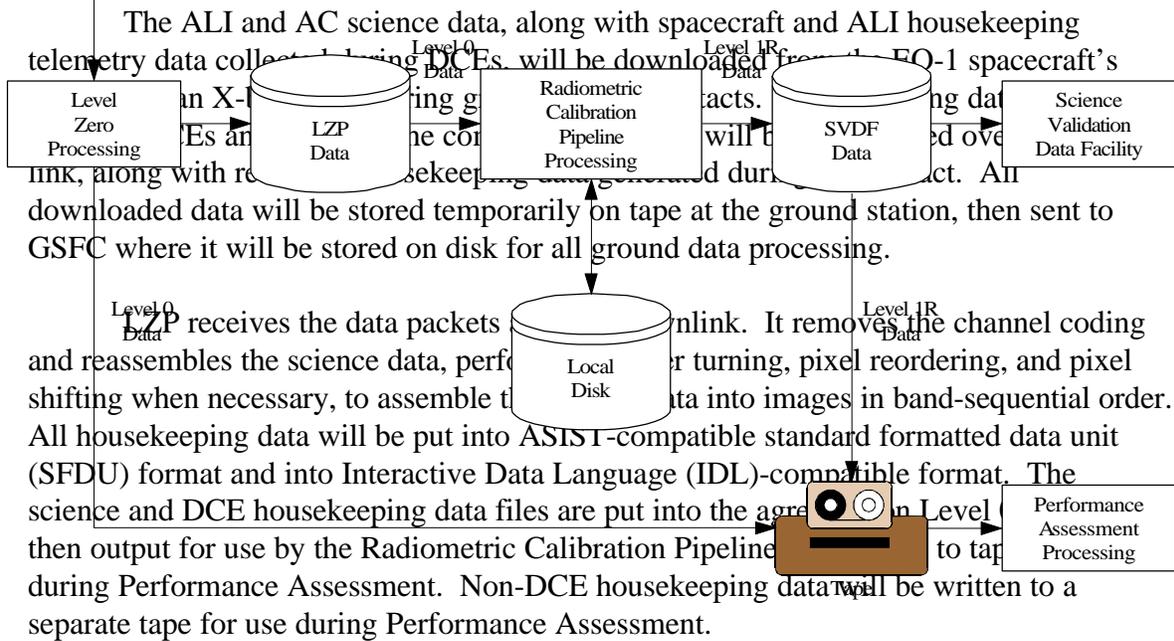

The Radiometric Calibration Pipeline will be run whenever Level 1R data is required or requested. It reads the Level 0 data which includes, at a minimum, science DCEs with calibration dark data. The Level 0 data may also include any of four types of calibration DCEs: solar, lunar, internal flood lamps, or deep space. This calibration pipeline will generate a Level 1R ALI science file for each Level 0 ALI science and calibration file. The Level 1R files will also contain the calibration coefficients used for

each pixel so that the Level 0 data can be recovered from the Level 1R files. These files are put into the agreed upon Level 1R format and written to the SVDF disk for use by the SVDF and to tape for use during Performance Assessment. An archive of the calibration database and calibration processing notes will also be maintained by the Radiometric Calibration Pipeline.

All the Level 0 data and all the generated Level 1R data are written to tape for delivery to LL for Performance Assessment. Performance Assessment will evaluate the performance of the Radiometric Calibration Pipeline in addition to the general spectral and spatial performance of the ALI. For proper Performance Assessment, all available data products must be included in the analysis. These products include the AC data and any improved ephemeris or attitude data generated by the ground processing system in addition to the previously mentioned Level 0 and Level 1R data and housekeeping data from both during and between DCEs.

1.3 Applicable Documents

The documents listed below offer additional information on the EO-1 data processing system and the Hierarchical Data Format (HDF), which is used for all exchanged data files.

1. EO-1 System Design Document (work in progress)
2. National Center for Supercomputing Applications (NCSA) HDF Development Group, *HDF User's Guide*, June 4, 1997. URL:<http://hdf.ncsa.uiuc.edu/doc.html>
3. NCSA HDF Development Group, *HDF User's Reference Manual v4.1r1*, Draft June 9, 1997. URL:<http://hdf.ncsa.uiuc.edu/doc.html>
4. NCSA HDF Development Group, *HDF Specification and Developer's Guide, Version 3.2*, September 1993. URL:<http://hdf.ncsa.uiuc.edu/doc.html>

2 Document Coordination

Document changes will be coordinated through designated persons. Currently they are:

GSFC:	S. Ungar,	(301) 286-4007,	E-mail: stephen.g.ungar.1@gsfc.nasa.gov
	M. Jurotich	(301) 286-5919,	E-mail: matthew.m.jurotich@gsfc.nasa.gov
	D. Mandl,	(301) 286-4323,	E-mail: daniel.j.mandl.1@gsfc.nasa.gov
	R. Hollenhorst	(301) 286-5972,	E-mail: richard.hollenhorst@gsfc.nasa.gov
LL:	J. Evans,	(781) 981-3088,	E-mail: jenifer@ll.mit.edu
	H. Vighh,	(781) 981-4232,	E-mail: vighh@ll.mit.edu

All additions and changes to this interface control document (ICD), after it is approved, will be appropriately marked in this document and recorded in the change log at the beginning of this document.

3 Data Exchange

All data files for use during Performance Assessment will be exchanged for the duration of the mission using tape media mailed from GSFC to LL. All data files for use by the Radiometric Calibration Pipeline will be exchanged electronically by following an entered pathname to the LZP data and by writing to an entered pathname to the SVDF, respectively.

3.1 Tape Media Specification

All data products to be sent from GSFC to LL shall be transmitted via cartridge tape media. The baseline tape shall be an uncompressed 20-GB capacity, digital linear tape (DLT)-compatible cartridge for a DLT4000 tape drive. Upgrades to higher density media or use of compressed formats will be made upon concurrence of both GSFC and LL. The file formats and naming conventions are defined later in this document in Section 0. The files shall be written to the tape by a UNIX tar command.

Each individual tape will contain one or more DCE file sets. A DCE file set will consist of all files, science, housekeeping, ground processing, etc., associated with a DCE. No file or DCE file set will be split across tapes. Non-DCE housekeeping files will be written on a separate tape.

Each tape will be accompanied by a hardcopy list of its contents, including file name, file size (in bytes), and any applicable processing notes. The files will be listed in the order that they are stored on the tape. The contents list will also be stored on the tape in an ASCII file.

3.2 Tape Contents

The data products sent from GSFC to LL for Performance Assessment should include all of the Level 0 science data, any generated Level 1R calibrated science data and calibration coefficients, the DCE and the non-DCE housekeeping files, the AC data files, any existing ground processing data files, and all calibration pipeline processing notes. The minimum files required for Performance Assessment are:

0EO1#####.TCZ
EO1yyyydddhhmss.M1Z
EO1yyyydddhhmss.M2Z

EO1yyyydddhhmmss.M3Z
EO1yyyydddhhmmss.M4Z
EO1yyyydddhhmmss.WVZ
EO1yyyydddhhmmss.WSZ
EO1yyyydddhhmmss.GVZ
EO1yyyydddhhmmss.GSZ
EO1yyyydddhhmmss.ACZ
EO1yyyydddhhmmss.NHZ
EO1yyyydddhhmmss.DHZ
EO1yyyydddhhmmss.IHZ
EO1yyyydddhhmmss.GPZ¹

If the following Level 1R files have been generated, they also are required for Performance Assessment:

EO1yyyydddhhmmss.M1R
EO1yyyydddhhmmss.M2R
EO1yyyydddhhmmss.M3R
EO1yyyydddhhmmss.M4R
EO1yyyydddhhmmss.WVR
EO1yyyydddhhmmss.WSR
EO1yyyydddhhmmss.GVR
EO1yyyydddhhmmss.GSR
EO1yyyydddhhmmss.PLR

Each of these files is defined in Sections 4.1 Level 0 Data Products through 4.3 Non-Calibration Pipeline Data Files.

3.3 Tape Labels

The format and content of the tape label for tapes sent from GSFC to LL are as follows:

EO-1 GSFC to LL Transfer Tape

GENERATION DATE: 07/21/99

TAPE ID NUMBER: #####

Tape ID numbers will begin at 00000001 during prelaunch testing and increment by one for each successive tape generated during the EO-1 program.

¹ May not exist. See Section Ground Processing Data Files (GPZ).

3.4 LL Address

Tapes shall be mailed to LL at the following address:

Jenifer Evans
Room S4-557
MIT Lincoln Laboratory
244 Wood Street
Lexington, MA 02420-9185

4 Data Product Definitions

This section defines the intermediate data products of the EO-1 data ground processing. It is divided into three sections. Section 4.1 Level 0 Data Products describes the Level 0 data products output from the GSFC-developed Level Zero Processor, and input to the LL-developed Level 1R Radiometric Calibration Pipeline. Section 4.2 Level 1R Radiometrically Calibrated Data Products describes the Level 1R data products output from the LL-developed Radiometric Calibration Pipeline, a part of the GSFC-developed SVDF. Section 4.3 Non-Calibration Pipeline Data Files describes additional data files necessary for accurate Performance Assessment that are neither an input nor an output of the Radiometric Calibration Pipeline.

All data products will be in HDF with the exception of the SFDU-formatted housekeeping data. The Level 0 input data products and the Level 1R output data products will be a collection of data files generated with the HDF scientific data (SD) application programming interfaces (APIs). The number of files associated with the Level 0 input data and the Level 1R output data varies depending on how many of the five independent data ports are active for a DCE. Each independent data port will correspond to a single SD file for the Level 0 input data. Each input SD file from a science DCE will have a corresponding output SD file.

Each SD file contains two major parts: the file header and the data objects. The file header information contains a number of attributes, with each attribute consisting of an attribute name, an attribute count defining the length of the attribute information, and an attribute type. An example of an attribute is the filename. The attribute would be called 'Filename', would be of type DFNT_CHAR8, and would contain 21 bytes, e.g., EO11997365235959.WVZ. A data object contains a multi-dimensional scientific data set (SDS), e.g., a three dimensional set of elements, and a data descriptor block defining the type of data, its location in the file, and the length of the data. Each SDS can have its own set of attributes in addition to the attributes that are part of the file header. The Level 1R radiometrically calibrated output data files will have multiple SDSs: one for the Level 1R data, one for the dark offset coefficients, and one for the response coefficients. The

MS/PAN files also will have multiple SDSs: one for the Level 0 MS data, one for the MS dark data, one for the MS lamp data, one for the Level 0 PAN data, one for the PAN dark data, one for the PAN lamp data, and one for the MS SWIR pixel map.

4.1 Level 0 Data Products

The following subsections describe the data output from the GSFC-developed Level Zero Processor and input to the LL-developed Radiometric Calibration Pipeline. The first three sections describe the expected bit order, fill pixels, and pixel order. The remaining sections describe the data files serving as the output products of LZP and the input products of the Radiometric Calibration Pipeline. These data files will reside on a GSFC LZP disk for access by the Radiometric Calibration Pipeline. They will also be written to tape for use by LL for Performance Assessment.

4.1.1 Level 0 Data Processing

4.1.1.1 Bit Order

The science and calibration data are output from the LZP as 16-bit words with 12 bits of precision. The four most significant bits (MSBs) are used to indicate type of fill data and may be used to indicate other significant processing features. The bit order output by LZP should be that the least significant bit (LSB) of a pixel value should correspond to the LSB of the 16-bit word, and the MSB of a pixel value should correspond to the 12th MSB of the 16-bit word. For example, the following line of C code should be true: `PixelValue = (0xfff & PixelValue)` where PixelValue is the 16-bit data word.

4.1.1.2 Fill Pixels

The MS/PAN science and calibration data will be shifted during LZP to allow for quick-look performance assessment of the system. This will result in the need for fill pixels at the ends of rows. Each pixel is represented by a 16-bit integer although the data requires only the 12 LSBs. The fill pixels inserted for the purpose of aligning the MS/PAN data will be 0x3000, all 0s in the 12 LSBs that typically contain data and 0011 in the upper four bits. The fill pixels inserted for missing data for all of the data ports will be 0x5000, all 0s in the 12 LSBs and 0101 in the upper 4 bits.

For PAN, the number of fill pixels at one or the other end of each row is 6 (Figure **Error! Style not defined.-Error! Bookmark not defined.** and Figure **Error! Style not defined.-Error! Bookmark not defined.**) For the MS VNIR band, the number of fill pixels at one or the other end of each row is 2 (Figure **Error! Style not defined.-Error! Bookmark not defined.** and Figure **Error! Style not defined.-Error! Bookmark not**

defined..) For the MS SWIR band, the number of fill pixels at one or the other end of each row is between 2 and 6, inclusive, depending on the use of the primary or redundant detector (Figure **Error! Style not defined.-Error! Bookmark not defined.** and Figure **Error! Style not defined.-Error! Bookmark not defined.**) The map defining the use of the primary and redundant detectors for the MS SWIR is included with the data file as an SDS.

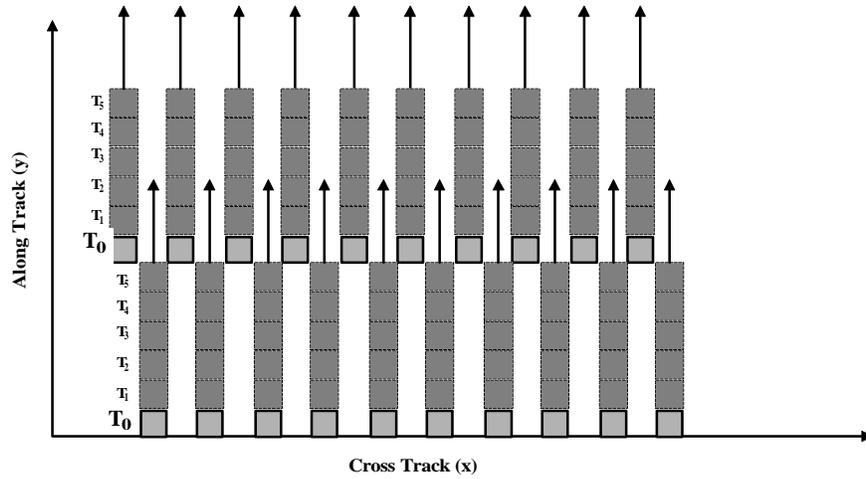


Figure **Error! Style not defined.-Error! Bookmark not defined.** PAN pixel locations.

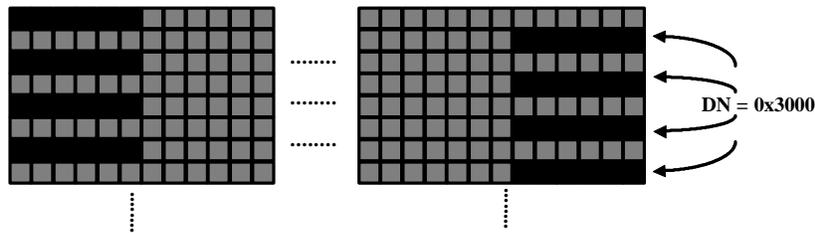


Figure **Error! Style not defined.-Error! Bookmark not defined.** PAN image.

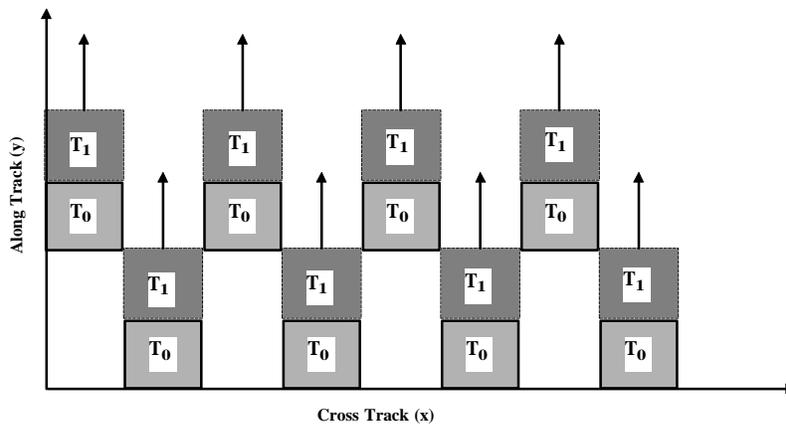


Figure *Error! Style not defined.-Error! Bookmark not defined.* MS VNIR pixel locations.

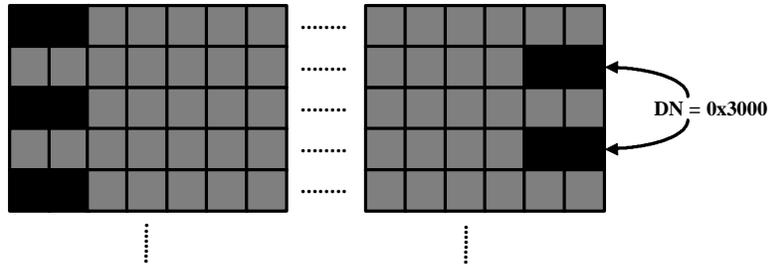


Figure *Error! Style not defined.-Error! Bookmark not defined.* MS VNIR single band image.

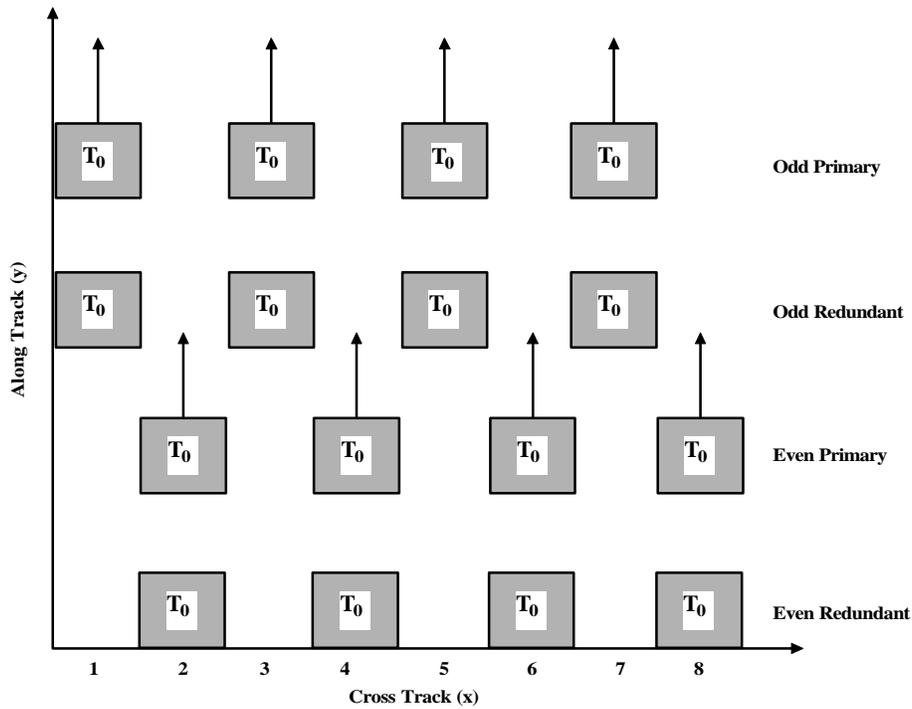


Figure *Error! Style not defined.-Error! Bookmark not defined.* MS SWIR pixel locations.


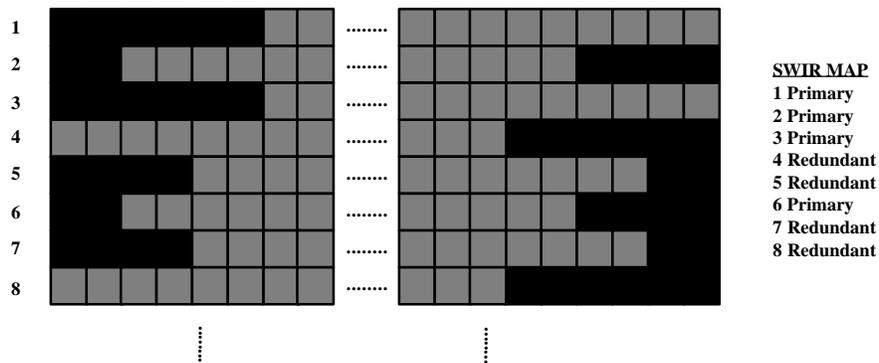


Figure Error! Style not defined.-Error! Bookmark not defined.. MS SWIR single band image.

4.1.1.3 Pixel Order

The science and calibration data will be in band-sequential order for all ports. The first two dimensions are the x and y of the image plane (x in cross track, y along track) and are stored in row major order. The third dimension, z, will be the band dimension (with the band number increasing as you go down into the image parallelepiped.) The dark data and lamp data will be in the same SD file as the science or calibration data, but each in a different SDS. In the case of two GIS ports, the image parallelepiped is in the shape of a brick with all sides being rectangles (Figure Error! Style not defined.-Error! Bookmark not defined..)However, the parallelepipeds of the MS/PAN and two WIS ports will be skewed so that each band is displaced by one pixel in the y along track direction with respect to its neighbor because the leading and trailing focal plane reads do not result in complete spectral coverage (Figure Error! Style not defined.-Error! Bookmark not defined..)However, no padding will be added to remove this skew in either LZP or in the radiometric calibration pipeline.

Figure Error! Style not defined.-Error! Bookmark not defined.. GIS Image Parallelepiped

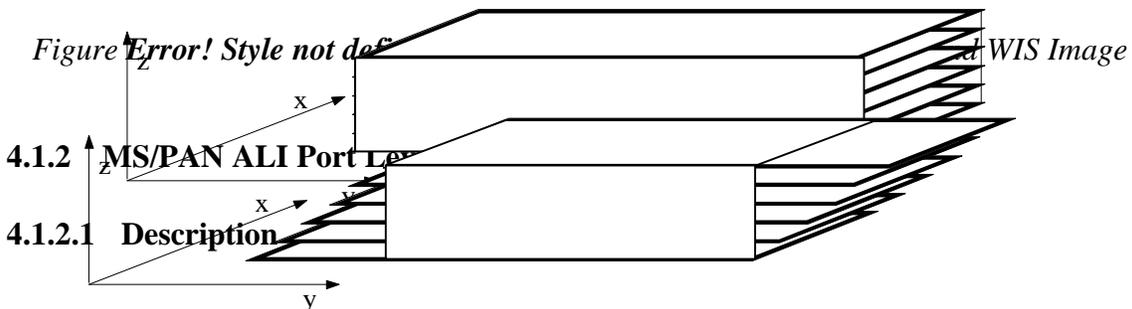

These files contain the MS/PAN raw data collected by the WARP from the MS/PAN ALI ports during a DCE. The DCE can collect either calibration or science data. The MS/PAN data are collected by four focal plane arrays. Four MS/PAN data files correspond to the four separate focal plane arrays. Each data file has seven SDSs, one for the Level 0 MS data, one for the MS dark data, one for the MS lamp data, one for the Level 0 PAN data, one for the PAN dark data, one for the PAN lamp data, and one for the MS SWIR pixel map. The data is 16-bits per pixel, with HDF attributes containing information regarding the files and the Level 0 processing notes.

4.1.2.2 Support Duration

GSFC will generate these files through all mission phases. For the first 60 post-launch days of the mission, these files will be delivered to LL by overnight mail. For the remainder of the mission, these files will be delivered to LL within 1 week of generation.

4.1.2.3 Format

4.1.2.3.1 MS/PAN Focal Plane Array 1 (M1Z)

Filename: EO1yyyydddhhmmss.M1Z

The **yyyydddhhmmss** time will be the start time of the DCE generating the science data present in the file.

File Attributes:

Name	Max. Length	HDF Type	Example value
Filename	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M1Z"
Data Product Level	1	DFNT_INT16	0
LZP Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Big (1) or Little (0) Endian	1	DFNT_INT16	1
Time of File Generation	14	DFNT_CHAR8	"yyyydddhhmmss"
Number Related Files	1	DFNT_INT16	9
Related File 1	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M2Z",
Related File 2	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M3Z",
Related File 3	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M4Z",
...
Related File n	21	DFNT_CHAR8	"EO1yyyydddhhmmss.DHZ"
Level 0 Processing Notes	N	DFNT_CHAR8	N bytes of string data.

SDS Attributes for Level 0 MS data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS1"
Dataset Type	12	DFNT_CHAR8	"Level 0"
Data Start Time	14	DFNT_CHAR8	"yyyymmddhhmmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	9
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for MS dark data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS1"
Dataset Type	12	DFNT_CHAR8	"Dark"
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	9
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for MS lamp data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS1"
Dataset Type	12	DFNT_CHAR8	"Lamp"
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	9
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for Level 0 PAN data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
-------------	--------------------	-----------------	----------------------

ALI Sensor	4	DFNT_CHAR8	“PN1”
Dataset Type	12	DFNT_CHAR8	"Level 0"
Data Start Time	14	DFNT_CHAR8	"yyyymmddhhmmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	960
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	1
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for PAN dark data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	“PN1”
Dataset Type	12	DFNT_CHAR8	"Dark"
Number of cross track pixels	1	DFNT_INT16	960
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	1
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for PAN lamp data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	“PN1”
Dataset Type	12	DFNT_CHAR8	"Lamp"
Number of cross track pixels	1	DFNT_INT16	960
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	1
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for MS SWIR pixel map:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	“MS1”
Dataset Type	12	DFNT_CHAR8	"PixelMap"
Number of cross track pixels	1	DFNT_INT16	320

4.1.2.3.2 MS/PAN Focal Plane Array 2 (M2Z)

Filename: EO1yyyydddhhmss.M2Z

The **yyyydddhhmss** time will be the start time of the DCE generating the science data present in the file.

File Attributes:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
Filename	21	DFNT_CHAR8	"EO1yyyydddhhmss.M2Z"
Data Product Level	1	DFNT_INT16	0
LZP Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Big (1) or Little (0) Endian	1	DFNT_INT16	1
Time of File Generation	14	DFNT_CHAR8	"yyyydddhhmss"
Number Related Files	1	DFNT_INT16	9
Related File 1	21	DFNT_CHAR8	"EO1yyyydddhhmss.M1Z",
Related File 2	21	DFNT_CHAR8	"EO1yyyydddhhmss.M3Z",
Related File 3	21	DFNT_CHAR8	"EO1yyyydddhhmss.M4Z",
...
Related File n	21	DFNT_CHAR8	"EO1yyyydddhhmss.DHZ"
Level 0 Processing Notes	N	DFNT_CHAR8	N bytes of string data

SDS Attributes for Level 0 MS data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS2"
Dataset Type	12	DFNT_CHAR8	"Level 0"
Data Start Time	14	DFNT_CHAR8	"yyyydddhhmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	9
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for MS dark data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS2"

Dataset Type	12	DFNT_CHAR8	"Dark"
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	9
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for MS lamp data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS2"
Dataset Type	12	DFNT_CHAR8	"Lamp"
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	9
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for Level 0 PAN data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"PN2"
Dataset Type	12	DFNT_CHAR8	"Level 0"
Data Start Time	14	DFNT_CHAR8	"yyyydddhhmmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	960
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	1
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for PAN dark data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"PN2"
Dataset Type	12	DFNT_CHAR8	"Dark"
Number of cross track pixels	1	DFNT_INT16	960
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	1
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for PAN lamp data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"PN2"
Dataset Type	12	DFNT_CHAR8	"Lamp"
Number of cross track pixels	1	DFNT_INT16	960
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	1
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for MS SWIR pixel map:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS2"
Dataset Type	12	DFNT_CHAR8	"Pixel Map"
Number of cross track pixels	1	DFNT_INT16	320

4.1.2.3.3 MS/PAN Focal Plane Array 3 (M3Z)

Filename: EO1yyyydddhhmmss.M3Z

The **yyyydddhhmmss** time will be the start time of the DCE generating the science data present in the file.

File Attributes:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
Filename	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M3Z"
Data Product Level	1	DFNT_INT16	0
LZP Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Big (1) or Little (0) Endian	1	DFNT_INT16	1
Time of File Generation	14	DFNT_CHAR8	"yyyydddhhmmss"
Number Related Files	1	DFNT_INT16	9
Related File 1	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M1Z",
Related File 2	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M2Z",
Related File 3	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M4Z",
...

Related File n	21	DFNT_CHAR8	"EO1yyyydddhhmss.DHZ"
Level 0 Processing Notes	N	DFNT_CHAR8	N bytes of string data

SDS Attributes for Level 0 MS data:

Name	Max. Length	HDF Type	Example value
ALI Sensor	4	DFNT_CHAR8	"MS3"
Dataset Type	12	DFNT_CHAR8	"Level 0"
Data Start Time	14	DFNT_CHAR8	"yyyydddhhmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	9
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for MS dark data:

Name	Max. Length	HDF Type	Example value
ALI Sensor	4	DFNT_CHAR8	"MS3"
Dataset Type	12	DFNT_CHAR8	"Dark"
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	9
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for MS lamp data:

Name	Max. Length	HDF Type	Example value
ALI Sensor	4	DFNT_CHAR8	"MS3"
Dataset Type	12	DFNT_CHAR8	"Lamp"
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	9
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for Level 0 PAN data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"PN3"
Dataset Type	12	DFNT_CHAR8	"Level 0"
Data Start Time	14	DFNT_CHAR8	"yyydddhhmmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	960
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	1
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for PAN dark data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"PN3"
Dataset Type	12	DFNT_CHAR8	"Dark"
Number of cross track pixels	1	DFNT_INT16	960
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	1
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for PAN lamp data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"PN3"
Dataset Type	12	DFNT_CHAR8	"Lamp"
Number of cross track pixels	1	DFNT_INT16	960
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	1
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for MS SWIR pixel map:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS3"
Dataset Type	12	DFNT_CHAR8	"Pixel Map"
Number of cross track pixels	1	DFNT_INT16	320

4.1.2.3.4 MS/PAN Focal Plane Array 4 (M4Z)

Filename: EO1yyyydddhhmss.M4Z

The **yyyydddhhmss** time will be the start time of the DCE generating the science data present in the file.

File Attributes:

Name	Max. Length	HDF Type	Example value
Filename	21	DFNT_CHAR8	"EO1yyyydddhhmss.M4Z"
Data Product Level	1	DFNT_INT16	0
LZP Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Big (1) or Little (0) Endian	1	DFNT_INT16	1
Time of File Generation	14	DFNT_CHAR8	"yyyydddhhmss"
Number Related Files	1	DFNT_INT16	9
Related File 1	21	DFNT_CHAR8	"EO1yyyydddhhmss.M1Z",
Related File 2	21	DFNT_CHAR8	"EO1yyyydddhhmss.M2Z",
Related File 3	21	DFNT_CHAR8	"EO1yyyydddhhmss.M3Z",
...
Related File n	21	DFNT_CHAR8	"EO1yyyydddhhmss.DHZ"
Level 0 Processing Notes	N	DFNT_CHAR8	N bytes of string data

SDS Attributes for Level 0 MS data:

Name	Max. Length	HDF Type	Example value
ALI Sensor	4	DFNT_CHAR8	"MS4"
Dataset Type	12	DFNT_CHAR8	"Level 0"
Data Start Time	14	DFNT_CHAR8	"yyyydddhhmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	9
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for MS dark data:

Name	Max. Length	HDF Type	Example value
------	-------------	----------	---------------

ALI Sensor	4	DFNT_CHAR8	"MS4"
Dataset Type	12	DFNT_CHAR8	"Dark"
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	9
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for MS lamp data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS4"
Dataset Type	12	DFNT_CHAR8	"Lamp"
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	9
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for Level 0 PAN data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"PN4"
Dataset Type	12	DFNT_CHAR8	"Level 0"
Data Start Time	14	DFNT_CHAR8	"yyyydddhhmmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	960
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	1
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for PAN dark data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"PN4"
Dataset Type	12	DFNT_CHAR8	"Dark"
Number of cross track pixels	1	DFNT_INT16	960
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	1
Percent Missing Data	1	DFNT_INT16	11

(1, 1, 2),.....(320, 1, 2),
 (1, 2, 2),.....(320, 2, 2),
 ⋮
 (1, 500, 9),.....(320, 500, 9)

Each MS focal plane array has 320 pixels cross track and will have however many pixels along track as are generated by the duration of the DCE. The order of the nine bands is as follows:

- MS Band 1'
- MS Band 1
- MS Band 2
- MS Band 3
- MS Band 4
- MS Band 4'
- MS Band 5'
- MS Band 5
- MS Band 7

4.1.2.4.2 PAN SDS Format

The data format for the Level 0 raw data and for the dark data and lamp data is the same. Each dataset will be in a two-dimensional array consisting of a single image for the PAN band. The dimensions are x in cross track and y along track. The data array will consist of all the cross track pixels for a single line followed by all the cross track pixels for the next line along track.

If there are 960 cross track pixels and 500 along track lines the (x, y) data array will be as follows:

(1, 1),.....(960, 1),
 (1, 2),.....(960, 2),
 ⋮
 (1, 500),.....(960, 500)

4.1.2.4.3 MS SWIR Pixel Map SDS Format

The data will be in a one-dimensional array consisting of a single element for each cross track pixel. For each cross track pixel, there are two detectors, the primary and the redundant. If the primary detector is used, the element will be a 1. If the redundant detector is used, the element will be a 0.

4.1.2.5 Accuracy and Completeness

Data completeness will be as high as possible, with all available data processed. The actual level of data completeness will be identified within the production data files through the specification of byte locations of data fill pattern.

4.1.2.6 Maximum File Size

Each of the four data files will be recorded from the ALI port at a rate of 225 Hz for MS data and 675 Hz for PAN data, which corresponds to 648,000 pixels per second of both MS data and PAN data. Assuming 1 kB of attributes and a 30-second DCE, the total file size for a single focal plane array will be approximately 76 MB for a science DCE. Each of the various calibration DCE files will be no larger than a 30-second science DCE file and may be substantially smaller.

4.1.2.7 File Access

The Radiometric Calibration Pipeline will be given a pathname to the LZP output data. Performance Assessment will receive a tape containing LZP output data.

4.1.3

WIS VNIR ALI Port Level 0 Raw Data File (WVZ)

4.1.3.1 Description

This file contains the raw data collected by the WARP from the WIS VNIR ALI port during a DCE. The DCE can collect either calibration or science data. The data file has three SDSs: one for the WIS VNIR Level 0 data, one for the WIS VNIR dark data, and one for the WIS VNIR lamp data. The data is in 16-bits per pixel, of which only the 12 LSBs are used, with HDF attributes containing information regarding the file and the Level 0 processing notes.

4.1.3.2 Support Duration

GSFC will generate this file through all mission phases. For the first 60 post-launch days of the mission, this file will be delivered to LL by overnight mail. For the remainder of the mission, this file will be delivered to LL within 1 week of generation.

4.1.3.3 Format

Filename: EO1yyyydddhhmss.WVZ

The **yyyydddhhmss** time will be the start time of the DCE generating the science data present in the file.

File Attributes:

Name	Max. Length	HDF Type	Example value
Filename	21	DFNT_CHAR8	"EO1yyyydddhhmss.WVZ"
Data Product Level	1	DFNT_INT16	0
LZP Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Big (1) or Little (0) Endian	1	DFNT_INT16	1
Time of File Generation	14	DFNT_CHAR8	"yyyydddhhmss"
Number Related Files	3	DFNT_INT16	9
Related File 1	21	DFNT_CHAR8	"EO1yyyydddhhmss.WSZ",
Related File 2	21	DFNT_CHAR8	"EO1yyyydddhhmss.GVZ",
Related File 3	21	DFNT_CHAR8	"EO1yyyydddhhmss.M4Z",
...
Related File n	21	DFNT_CHAR8	"EO1yyyydddhhmss.DHZ"
Level 0 Processing Notes	N	DFNT_CHAR8	N bytes of string data

SDS Attributes for Level 0 data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	“WV”
Dataset Type	12	DFNT_CHAR8	"Level 0"
Data Start Time	14	DFNT_CHAR8	"yyyymmddhhmmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	105
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for dark data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	“WV”
Dataset Type	12	DFNT_CHAR8	"Dark"
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	105
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for lamp data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	“WV”
Dataset Type	12	DFNT_CHAR8	"Lamp"
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	105
Percent Missing Data	1	DFNT_INT16	11

4.1.3.4 Data Format

The data format for the Level 0 raw data and for the dark data and lamp data is the same. Each dataset will be in a three-dimensional array: x in cross track, y along track, and z in the spectral band dimension. The array will consist of images for each band in band-sequential order, and each image will be written in row major format with each row

4.1.4

WIS SWIR ALI Port Level 0 Raw Data File (WSZ)

4.1.4.1 Description

This file contains the raw data collected by the WARP from the WIS SWIR ALI port during a DCE. The DCE can collect either calibration or science data. The data file has three SDSs: one for the WIS SWIR Level 0 data, one for the WIS SWIR dark data, and one for the WIS SWIR lamp data. The data is in 16-bits per pixel, of which only the 12 LSBs are used, with HDF attributes containing information regarding the file and the Level 0 processing notes.

4.1.4.2 Support Duration

GSFC will generate this file through all mission phases. For the first 60 post-launch days of the mission, this file will be delivered to LL by overnight mail. For the remainder of the mission, this file will be delivered to LL within 1 week of generation.

4.1.4.3 Format

Filename: EO1yyyydddhhmmss.WSZ

The **yyyydddhhmmss** time will be the start time of the DCE generating the science data present in the file.

File Attributes:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
Filename	21	DFNT_CHAR8	"EO1yyyydddhhmmss.WSZ"
Data Product Level	1	DFNT_INT16	0
LZP Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Big (1) or Little (0) Endian	1	DFNT_INT16	1
Time of File Generation	14	DFNT_CHAR8	"yyyydddhhmmss"
Number Related Files	1	DFNT_INT16	9
Related File 1	21	DFNT_CHAR8	"EO1yyyydddhhmmss.WVZ",
Related File 2	21	DFNT_CHAR8	"EO1yyyydddhhmmss.GVZ",
Related File 3	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M4Z",
...
Related File n	21	DFNT_CHAR8	"EO1yyyydddhhmmss.DHZ"
Level 0 Processing Notes	N	DFNT_CHAR8	N bytes of string data

SDS Attributes for Level 0 data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"WS"
Dataset Type	12	DFNT_CHAR8	"Level 0"
Data Start Time	14	DFNT_CHAR8	"yyyymmddhhmmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	210
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for dark data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"WS"
Dataset Type	12	DFNT_CHAR8	"Dark"
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	210
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for lamp data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"WS"
Dataset Type	12	DFNT_CHAR8	"Lamp"
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	210
Percent Missing Data	1	DFNT_INT16	11

4.1.4.4 Data Format

The data format for the Level 0 raw data and for the dark data and lamp data is the same. Each dataset will be in a three-dimensional array: x in cross track, y along track, and z in

the spectral band dimension. The array will consist of images for each band in band-sequential order, and each image will be written in row major format with each row corresponding to the cross track direction. Described heuristically, the data array will consist of all the cross track pixels for a single line and a single band, followed by all the cross track pixels for the next line along track and the same single band, and so on for all lines along track for a single band. This is repeated for each band.

If there are 320 cross track pixels, 500 along track lines, and 210 bands, the (x, y, z) data array will be as follows:

$$\begin{array}{l} (1, 1, 1), \dots (320, 1, 1), \\ (1, 2, 1), \dots (320, 2, 1), \\ \quad \vdots \qquad \qquad \qquad \quad \vdots \\ (1,500, 1), \dots (320,500, 1), \\ (1, 1, 2), \dots (320, 1, 2), \\ (1, 2, 2), \dots (320, 2, 2), \\ \quad \vdots \qquad \qquad \qquad \quad \vdots \\ (1,500,210), \dots (320,500,210) \end{array}$$

Each WIS SWIR band has 320 pixels cross track and will have however many pixels along track as are generated by the duration of the DCE. There are 210 bands in the z dimension.

4.1.4.5 Accuracy and Completeness

Data completeness will be as high as possible, with all available data processed. The actual level of data completeness will be identified within the production data file through the specification of byte locations of data fill pattern.

4.1.4.6 Maximum File Size

The data will be recorded from the ALI port at a rate of 225 Hz which corresponds to 15,120,000 pixels per second of data. Assuming 1 kB of attributes and a 30-second DCE, the total file size will be 865 Mbytes or just under 0.9 GB for a science DCE. Each of the various calibration DCE files will be no larger than a 30-second science DCE file and may be substantially smaller.

4.1.4.7 File Access

The Radiometric Calibration Pipeline will be given a pathname to the LZP output data.
Performance Assessment will receive a tape containing LZP output data.

4.1.5

GIS VNIR ALI Port Level 0 Raw Data File (GVZ)

4.1.5.1 Description

This file contains the raw data collected by the WARP from the GIS VNIR ALI port during a DCE. The DCE can collect either calibration or science data. The data file has three SDSs: one for the GIS VNIR Level 0 data, one for the GIS VNIR dark data, and one for the GIS VNIR lamp data. The data is in 16-bits per pixel, of which only the 12 LSBs are used, with HDF attributes containing information regarding the file and the Level 0 processing notes.

4.1.5.2 Support Duration

GSFC will generate this file through all mission phases. For the first 60 post-launch days of the mission, this file will be delivered to LL by overnight mail. For the remainder of the mission, this file will be delivered to LL within 1 week of generation.

4.1.5.3 Format

Filename: EO1yyyydddhhmss.GVZ

The **yyyydddhhmss** time will be the start time of the DCE generating the science data present in the file.

File Attributes:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
Filename	21	DFNT_CHAR8	"EO1yyyydddhhmss.GVZ"
Data Product Level	1	DFNT_INT16	0
LZP Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Big (1) or Little (0) Endian	1	DFNT_INT16	1
Time of File Generation	14	DFNT_CHAR8	"yyyydddhhmss"
Number Related Files	1	DFNT_INT16	9
Related File 1	21	DFNT_CHAR8	"EO1yyyydddhhmss.WSZ",
Related File 2	21	DFNT_CHAR8	"EO1yyyydddhhmss.GSZ",
Related File 3	21	DFNT_CHAR8	"EO1yyyydddhhmss.M4Z",
...
Related File n	21	DFNT_CHAR8	"EO1yyyydddhhmss.DHZ"
Level 0 Processing Notes	N	DFNT_CHAR8	N bytes of string data

SDS Attributes for Level 0 data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	“GV”
Dataset Type	12	DFNT_CHAR8	"Level 0"
Data Start Time	14	DFNT_CHAR8	"yyyymmddhhmmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	105
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for dark data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	“GV”
Dataset Type	12	DFNT_CHAR8	"Dark"
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	105
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for lamp data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	“GV”
Dataset Type	12	DFNT_CHAR8	"Lamp"
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	105
Percent Missing Data	1	DFNT_INT16	11

4.1.5.4 Data Format

The data format for the Level 0 raw data and for the dark data and lamp data is the same. Each dataset will be in a three-dimensional array: x in cross track, y along track, and z in the spectral band dimension. The array will consist of images for each band in band-sequential order, and each image will be written in row major format with each row corresponding to the cross track direction. Described heuristically, the data array will consist of all the cross track pixels for a single line and a single band, followed by all the cross track pixels for the next line along track and the same single band, and so on for all lines along track for a single band. This is repeated for each band.

If there are 320 cross track pixels, 500 along track lines, and 105 bands, the (x, y, z) data array will be as follows:

$$\begin{array}{l}
 (1, 1, 1), \dots (320, 1, 1), \\
 (1, 2, 1), \dots (320, 2, 1), \\
 \quad \vdots \qquad \qquad \qquad \quad \vdots \\
 (1,500, 1), \dots (320,500, 1), \\
 (1, 1, 2), \dots (320, 1, 2), \\
 (1, 2, 2), \dots (320, 2, 2), \\
 \quad \vdots \qquad \qquad \qquad \quad \vdots \\
 (1,500,105), \dots (320,500,105)
 \end{array}$$

Each WIS VNIR band has 320 pixels cross track and will have however many pixels along track as are generated by the duration of the DCE. There are 105 bands in the z dimension.

4.1.5.5 Accuracy and Completeness

Data completeness will be as high as possible, with all available data processed. The actual level of data completeness will be identified within the production data file through the specification of byte locations of data fill pattern.

4.1.5.6 Maximum File Size

The data will be recorded from the ALI port at a rate of 225 Hz which corresponds to 7,560,000 pixels per second of data. Assuming 1 kB of attributes and a 30-second DCE, the total file size will be 433 Mbytes or just under 0.5 GB for a science DCE. Each of the various calibration DCE files will be no larger than a 30-second science DCE file and may be substantially smaller.

4.1.5.7 File Access

The Radiometric Calibration Pipeline will be given a pathname to the LZP output data. Performance Assessment will receive a tape containing LZP output data.

4.1.6

GIS SWIR ALI Port Level 0 Raw Data File (GSZ)

4.1.6.1 Description

This file contains the raw data collected by the WARP from the GIS SWIR ALI port during a DCE. The DCE can collect either calibration or science data. The data file has three SDSs: one for the GIS SWIR Level 0 data, one for the GIS SWIR dark data, and one for the GIS SWIR lamp data. The data is in 16-bits per pixel, of which only the 12 LSBs are used, with HDF attributes containing information regarding the file and the Level 0 processing notes.

4.1.6.2 Support Duration

GSFC will generate this file through all mission phases. For the first 60 post-launch days of the mission, this file will be delivered to LL by overnight mail. For the remainder of the mission, this file will be delivered to LL within 1 week of generation.

4.1.6.3 Format

Filename: EO1yyyydddhhmmss.GSZ

The **yyyydddhhmmss** time will be the start time of the DCE generating the science data present in the file.

File Attributes:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
Filename	21	DFNT_CHAR8	"EO1yyyydddhhmmss.GSZ"
Data Product Level	1	DFNT_INT16	0
LZP Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Big (1) or Little (0) Endian	1	DFNT_INT16	1
Time of File Generation	14	DFNT_CHAR8	"yyyydddhhmmss"
Number Related Files	1	DFNT_INT16	9
Related File 1	21	DFNT_CHAR8	"EO1yyyydddhhmmss.WSZ",
Related File 2	21	DFNT_CHAR8	"EO1yyyydddhhmmss.GVZ",
Related File 3	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M4Z",
...
Related File n	21	DFNT_CHAR8	"EO1yyyydddhhmmss.DHZ"
Level 0 Processing Notes	N	DFNT_CHAR8	N bytes of string data

SDS Attributes for Level 0 data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	“GS”
Dataset Type	12	DFNT_CHAR8	"Level 0"
Data Start Time	14	DFNT_CHAR8	"yyyymmddhhmmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	210
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for dark data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	“GS”
Dataset Type	12	DFNT_CHAR8	"Dark"
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	210
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for lamp data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	“GS”
Dataset Type	12	DFNT_CHAR8	"Lamp"
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	500
Number of bands	1	DFNT_INT16	210
Percent Missing Data	1	DFNT_INT16	11

4.1.6.4 Data Format

The data format for the Level 0 raw data and for the dark data and lamp data is the same. Each dataset will be in a three-dimensional array: x in cross track, y along track, and z in the spectral band dimension. The array will consist of images for each band in band-sequential order, and each image will be written in row major format with each row corresponding to the cross track direction. Described heuristically, the data array will consist of all the cross track pixels for a single line and a single band, followed by all the cross track pixels for the next line along track and the same single band, and so on for all lines along track for a single band. This is repeated for each band.

If there are 320 cross track pixels, 500 along track lines, and 210 bands, the (x, y, z) data array will be as follows:

$$\begin{array}{l}
 (1, 1, 1), \dots (320, 1, 1), \\
 (1, 2, 1), \dots (320, 2, 1), \\
 \quad \vdots \qquad \qquad \qquad \quad \vdots \\
 (1, 500, 1), \dots (320, 500, 1), \\
 (1, 1, 2), \dots (320, 1, 2), \\
 (1, 2, 2), \dots (320, 2, 2), \\
 \quad \vdots \qquad \qquad \qquad \quad \vdots \\
 (1, 500, 210), \dots (320, 500, 210)
 \end{array}$$

Each WIS SWIR band has 320 pixels cross track and will have however many pixels along track as are generated by the duration of the DCE. There are 210 bands in the z dimension.

4.1.6.5 Accuracy and Completeness

Data completeness will be as high as possible, with all available data processed. The actual level of data completeness will be identified within the production data file through the specification of byte locations of data fill pattern.

4.1.6.6 Maximum File Size

The data will be recorded from the ALI port at a rate of 225 Hz which corresponds to 7,560,000 pixels per second of data. Assuming 1 kB of attributes and a 30-second DCE, the total file size will be 433 Mbytes or just under 0.5 GB for a science DCE. Each of the various calibration DCE files will be no larger than a 30-second science DCE file and may be substantially smaller.

4.1.6.7 File Access

The Radiometric Calibration Pipeline will be given a pathname to the LZP output data. Performance Assessment will receive a tape containing LZP output data.

4.1.7

DCE Housekeeping File (DHZ)

4.1.7.1 Description

This file contains the housekeeping telemetry data collected by the WARP during a DCE.

4.1.7.2 Support Duration

GSFC will generate this file through all mission phases. For the first 60 post-launch days of the mission, this file will be delivered to LL by overnight mail. For the remainder of the mission, this file will be delivered to LL within 1 week of generation.

4.1.7.3 Format

Filename: EO1yyyydddhhmmss.DHZ

The **yyyydddhhmmss** time will be the start time of the DCE during which the housekeeping data was collected.

File Format: The housekeeping data will be in the standard ASIST-compatible SFDU format as defined in Reference [TBD].

4.1.7.4 Accuracy and Completeness

Data completeness will be as high as possible, with all available data processed.

4.1.7.5 Maximum File Size

[TBD]

4.1.7.6 File Access

The Radiometric Calibration Pipeline will be given a pathname to the LZP output data. Performance Assessment will receive a tape containing LZP output data.

4.1.8 DCE IDL Housekeeping File (IHZ)

4.1.8.1 Description

This file contains the housekeeping telemetry data collected by the WARP during a DCE. It is IDL compatible.

4.1.8.2 Support Duration

GSFC will generate this file through all mission phases. For the first 60 post-launch days of the mission, this file will be delivered to LL by overnight mail. For the remainder of the mission, this file will be delivered to LL within 1 week of generation.

4.1.8.3 Format

Filename: EO1yyyydddhhmmss.IHZ

The **yyyydddhhmmss** time will be the start time of the DCE during which the housekeeping data was collect.

File Format: The housekeeping data will be readable by IDL (Version 5.0.)

4.1.8.4 Accuracy and Completeness

Data completeness will be as high as possible, with all available data processed.

4.1.8.5 Maximum File Size

[TBD]

4.1.8.6 File Access

The Radiometric Calibration Pipeline will be given a pathname to the LZP output data. Performance Assessment will receive a tape containing LZP output data.

4.2 Level 1R Radiometrically Calibrated Data Products

The following subsections individually describe each data product that will be output from the LL-developed Level 1R Radiometric Calibration Pipeline, a part of the GSFC-developed SVDF. These data files will reside on a GSFC SVDF disk and will also be written to tape for use by LL for Performance Assessment. These data files will be generated when requested and may not be generated for all Level 0 data files.

4.2.1 MS/PAN ALI Port Level 1R Radiometrically Calibrated Data Files (M1R – M4R)

4.2.1.1 Description

These files contain the radiometrically calibrated data generated from the Level 0 files of raw MS/PAN data collected by the WARP from the MS/PAN ALI port during a DCE. The DCE can be either calibration or science data. The four MS/PAN files correspond to the four separate focal plane arrays.

Each file contains the Level 0 file attributes with some modification, plus additional attributes associated with the radiometric calibration. The output data for each focal plane array is stored as one SD file with seven SDSs: the 16-bit scaled integer Level 1R calibrated data for MS and PAN, the 16-bit floating point dark offset coefficients applied to the Level 0 data for MS and PAN, the 16-bit floating point response coefficients applied to the Level 0 data for MS and PAN, and the MS SWIR pixel map. To recover the Level 0 data for a pixel, first divide the Level 1R engineering unit value by the response coefficient for that pixel, then add in the dark coefficient for that pixel.

4.2.1.2 Support Duration

GSFC will generate these files when requested through all mission phases. For the first 60 post-launch days of the mission, these files will be delivered to LL by overnight mail. For the remainder of the mission, these files will be delivered to LL within 1 week of generation.

4.2.1.3

Format

4.2.1.3.1 MS/PAN Focal Plane Array 1 (M1R)

Filename: EO1yyyydddhhmmss.M1R

The **yyyydddhhmmss** time will be the start time of the DCE that generated the data present in the file.

File Attributes:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
Filename	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M1R"
Data Product Level	1	DFNT_INT16	1
LZP Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Big (1) or Little (0) Endian	1	DFNT_INT16	1
Time of File Generation	14	DFNT_CHAR8	"yyyydddhhmmss"
Type of DCE	4	DFNT_CHAR8	"SCI" or "CAL"
Number Related Files	1	DFNT_INT16	9
Related File 1	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M2R",
Related File 2	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M3R",
...
Related File n	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M4R"
Level 0 Processing Notes	N	DFNT_CHAR8	N bytes of string data
Cal Pipe Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Cal Pipe Processing Notes	N	DFNT_CHAR8	N bytes of string data

SDS Attributes for Level 1R MS data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS1"
Dataset Type	12	DFNT_CHAR8	"Level 1R"
Data Start Time	14	DFNT_CHAR8	"yyyydddhhmmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	9
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for MS offset coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS1"
Dataset Type	12	DFNT_CHAR8	"Offset"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	9
Scale factor	1	DFNT_INT16	1000

SDS Attributes for MS response coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS1"
Dataset Type	12	DFNT_CHAR8	"Response"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	9
Scale factor	1	DFNT_INT16	1000

SDS Attributes for Level 1R PAN data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"PN1"
Dataset Type	12	DFNT_CHAR8	"Level 1R"
Data Start Time	14	DFNT_CHAR8	"yyyymmddhhmmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	9
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for PAN offset coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"PN1"
Dataset Type	12	DFNT_CHAR8	"Offset"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	9
Scale factor	1	DFNT_INT16	1000

SDS Attributes for PAN response coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"PN1"
Dataset Type	12	DFNT_CHAR8	"Response"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	9
Scale factor	1	DFNT_INT16	1000

SDS Attributes for MS SWIR pixel map:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS1"
Dataset Type	12	DFNT_CHAR8	"Pixel Map"
Number of cross track pixels	1	DFNT_INT16	320

4.2.1.3.2 MS/PAN Focal Plane Array 2 (M2R)

Filename: EO1yyyydddhhmss.M2R

The **yyyydddhhmss** time will be the start time of the DCE that generated the data present in the file.

File Attributes:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
Filename	21	DFNT_CHAR8	"EO1yyyydddhhmss.M2R"
Data Product Level	1	DFNT_INT16	1
LZP Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Big (1) or Little (0) Endian	1	DFNT_INT16	1
Time of File Generation	14	DFNT_CHAR8	"yyyydddhhmss"
Type of DCE	4	DFNT_CHAR8	"SCI" or "CAL"
Number Related Files	1	DFNT_INT16	9
Related File 1	21	DFNT_CHAR8	"EO1yyyydddhhmss.M1R",
Related File 2	21	DFNT_CHAR8	"EO1yyyydddhhmss.M3R",
...

Related File n	21	DFNT_CHAR8	"EO1yyyydddhhmss.M4R"
Level 0 Processing Notes	N	DFNT_CHAR8	N bytes of string data
Cal Pipe Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Cal Pipe Processing Notes	N	DFNT_CHAR8	N bytes of string data

SDS Attributes for Level 1R MS data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS2"
Dataset Type	12	DFNT_CHAR8	"Level 1R"
Data Start Time	14	DFNT_CHAR8	"yyyydddhhmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	9
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for MS offset coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS2"
Dataset Type	12	DFNT_CHAR8	"Offset"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	9
Scale factor	1	DFNT_INT16	1000

SDS Attributes for MS response coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS2"
Dataset Type	12	DFNT_CHAR8	"Response"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	9
Scale factor	1	DFNT_INT16	1000

SDS Attributes for Level 1R PAN data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"PN2"
Dataset Type	12	DFNT_CHAR8	"Level 1R"
Data Start Time	14	DFNT_CHAR8	"yyyymmddhhmmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	9
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for PAN offset coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"PN2"
Dataset Type	12	DFNT_CHAR8	"Offset"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	9
Scale factor	1	DFNT_INT16	1000

SDS Attributes for PAN response coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"PN2"
Dataset Type	12	DFNT_CHAR8	"Response"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	9
Scale factor	1	DFNT_INT16	1000

SDS Attributes for MS SWIR pixel map:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS2"
Dataset Type	12	DFNT_CHAR8	"Pixel Map"
Number of cross track pixels	1	DFNT_INT16	320

4.2.1.3.3 MS/PAN Focal Plane Array 3 (M3R)

Filename: EO1yyyydddhhmmss.M3R

The **yyyydddhhmmss** time will be the start time of the DCE that generated the data present in the file.

File Attributes:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
Filename	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M3R"
Data Product Level	1	DFNT_INT16	1
LZP Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Big (1) or Little (0) Endian	1	DFNT_INT16	1
Time of File Generation	14	DFNT_CHAR8	"yyyydddhhmmss"
Type of DCE	4	DFNT_CHAR8	"SCI" or "CAL"
Number Related Files	1	DFNT_INT16	9
Related File 1	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M1R",
Related File 2	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M2R",
...
Related File n	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M4R"
Level 0 Processing Notes	N	DFNT_CHAR8	N bytes of string data
Cal Pipe Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Cal Pipe Processing Notes	N	DFNT_CHAR8	N bytes of string data

SDS Attributes for Level 1R MS data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS3"
Dataset Type	12	DFNT_CHAR8	"Level 1R"
Data Start Time	14	DFNT_CHAR8	"yyyydddhhmmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	9
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for MS offset coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
-------------	--------------------	-----------------	----------------------

ALI Sensor	4	DFNT_CHAR8	"MS3"
Dataset Type	12	DFNT_CHAR8	"Offset"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	9
Scale factor	1	DFNT_INT16	1000

SDS Attributes for MS response coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS3"
Dataset Type	12	DFNT_CHAR8	"Response"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	9
Scale factor	1	DFNT_INT16	1000

SDS Attributes for Level 1R PAN data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"PN3"
Dataset Type	12	DFNT_CHAR8	"Level 1R"
Data Start Time	14	DFNT_CHAR8	"yyyymmddhhmmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	9
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for PAN offset coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"PN3"
Dataset Type	12	DFNT_CHAR8	"Offset"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	9
Scale factor	1	DFNT_INT16	1000

SDS Attributes for PAN response coefficient data:

Name	Max. Length	HDF Type	Example value
ALI Sensor	4	DFNT_CHAR8	"PN3"
Dataset Type	12	DFNT_CHAR8	"Response"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	9
Scale factor	1	DFNT_INT16	1000

SDS Attributes for MS SWIR pixel map:

Name	Max. Length	HDF Type	Example value
ALI Sensor	4	DFNT_CHAR8	"MS3"
Dataset Type	12	DFNT_CHAR8	"Pixel Map"
Number of cross track pixels	1	DFNT_INT16	320

4.2.1.3.4 MS/PAN Focal Plane Array 4 (M4R)

Filename: EO1yyyydddhhmmss.M4R

The **yyyydddhhmmss** time will be the start time of the DCE that generated the data present in the file.

File Attributes:

Name	Max. Length	HDF Type	Example value
Filename	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M4R"
Data Product Level	1	DFNT_INT16	1
LZP Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Big (1) or Little (0) Endian	1	DFNT_INT16	1
Time of File Generation	14	DFNT_CHAR8	"yyyydddhhmmss"
Type of DCE	4	DFNT_CHAR8	"SCI" or "CAL"
Number Related Files	1	DFNT_INT16	9
Related File 1	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M1R",
Related File 2	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M2R",
...
Related File n	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M3R"
Level 0 Processing Notes	N	DFNT_CHAR8	N bytes of string data
Cal Pipe Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Cal Pipe Processing Notes	N	DFNT_CHAR8	N bytes of string data

SDS Attributes for Level 1R MS data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS4"
Dataset Type	12	DFNT_CHAR8	"Level 1R"
Data Start Time	14	DFNT_CHAR8	"yyyymmddhhmmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	9
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for MS offset coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS4"
Dataset Type	12	DFNT_CHAR8	"Offset"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	9
Scale factor	1	DFNT_INT16	1000

SDS Attributes for MS response coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS4"
Dataset Type	12	DFNT_CHAR8	"Response"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	9
Scale factor	1	DFNT_INT16	1000

SDS Attributes for Level 1R PAN data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"PN4"
Dataset Type	12	DFNT_CHAR8	"Level 1R"

Data Start Time	14	DFNT_CHAR8	"yyyymmddhhmmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	9
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for PAN offset coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"PN4"
Dataset Type	12	DFNT_CHAR8	"Offset"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	9
Scale factor	1	DFNT_INT16	1000

SDS Attributes for PAN response coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"PN4"
Dataset Type	12	DFNT_CHAR8	"Response"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	9
Scale factor	1	DFNT_INT16	1000

SDS Attributes for MS SWIR pixel map:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"MS4"
Dataset Type	12	DFNT_CHAR8	"Pixel Map"
Number of cross track pixels	1	DFNT_INT16	320

4.2.1.4 Data Format

4.2.1.4.1 MS SDS Format

The data will be in a three-dimensional array: x in cross track, y along track, and z in the spectral band dimension. The array will consist of images for each band in band-sequential

order, and each image will be written in row major format with each row corresponding to the cross track direction. Described heuristically, the data array will consist of all the cross track pixels for a single line and a single band, followed by all the cross track pixels for the next line along track and the same single band, and so on for all lines along track for a single band. This is repeated for each band.

If there are 320 cross track pixels, 500 along track lines, and 9 bands, the (x, y, z) data array will be as follows:

```
( 1, 1, 1),.....(320, 1, 1),
( 1, 2, 1),.....(320, 2, 1),
  ⋮
( 1,500, 1),.....(320,500, 1),
( 1, 1, 2),.....(320, 1, 2),
( 1, 2, 2),.....(320, 2, 2),
  ⋮
( 1,500, 9),.....(320,500, 9)
```

The dark offset coefficient data will consist of a single coefficient for each cross track pixel for each band. The data will be stored with the cross track pixels in the x dimension. This is repeated for each band.

If there are 320 cross track pixels and 9 bands, the coefficient data array will be as follows:

```
( 1, 1),.....(320, 1),
( 1, 2),.....(320, 2),
  ⋮
( 1, 9),.....(320, 9)
```

The response coefficient data format is identical to the dark offset coefficient data format.

Each MS focal plane array has 320 pixels cross track and will have however many pixels along track as are generated by the duration of the DCE. The order of the 9 bands is as follows:

- MS Band 1'
- MS Band 1
- MS Band 2
- MS Band 3
- MS Band 4
- MS Band 4'
- MS Band 5'
- MS Band 5

MS Band 7

4.2.1.4.2 PAN SDS Format

The data will be in a two-dimensional array consisting of a single image for the PAN band. The dimensions are x in cross track and y along track. The data array will consist of all the cross track pixels for a single line followed by all the cross track pixels for the next line along track.

If there are 960 cross track pixels and 500 along track lines the (x, y) data array will be as follows:

$$\begin{array}{l} (1, 1), \dots (960, 1), \\ (1, 2), \dots (960, 2), \\ \vdots \qquad \qquad \qquad \vdots \\ (1, 500), \dots (960, 500) \end{array}$$

The dark offset coefficient data will consist of a single coefficient for each cross track pixel. The data array will be a single dimension data array.

The response coefficient data format is identical to the dark offset coefficient data format.

4.2.1.5 Accuracy and Completeness

Data completeness will be as high as possible, with all available data processed. The actual level of data completeness will be identified within the production data files through the specification of byte locations of data fill pattern. The byte locations with missing data will contain fill data 0x5000.

4.2.1.6 Maximum File Size

The data will be recorded from the ALI port at a rate of 675 Hz for PAN data and 225 Hz for MS data, which corresponds to 648,000 pixels per second of both PAN data and MS data. Assuming a 1 kB header and a 30-second DCE, the total file size including the calibrated data and all of the coefficients will be 76 MB for a science DCE.

4.2.1.7 File Access

Data will reside on a GSFC SVDF disk and will be written to tape as described in Section 0 for delivery to LL for Performance Assessment.

4.2.2 WIS VNIR ALI Port Level 1R Radiometrically Calibrated Data File (WVR)

4.2.2.1 Description

This file contains the radiometrically calibrated data generated from the Level 0 file of raw data collected by the WARP from the WIS VNIR ALI port during a DCE. The DCE can be either calibration or science data. The file contains the Level 0 file attributes with some modification, plus additional attributes associated with the radiometric calibration. The output data is stored as one SD file with three SDSs: the 16-bit scaled integer Level 1R calibrated data, the 16-bit floating point dark offset coefficients applied to the Level 0 data, and the 16-bit floating point response coefficients applied to the Level 0 data. To recover the Level 0 data for a pixel, first divide the Level 1R engineering unit value by the response coefficient for that pixel, then add in the dark coefficient for that pixel.

4.2.2.2 Support Duration

GSFC will generate this file when requested through all mission phases. For the first 60 post-launch days of the mission, this file will be delivered to LL by overnight mail. For the remainder of the mission, this file will be delivered to LL within 1 week of generation.

4.2.2.3 Format

Filename: EO1yyyydddhhmmss.WVR

The **yyyydddhhmmss** time will be the start time of the DCE that generated the data present in the file.

File Attributes:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
Filename	21	DFNT_CHAR8	"EO1yyyydddhhmmss.WVR"
Data Product Level	1	DFNT_INT16	1
LZP Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Big (1) or Little (0) Endian	1	DFNT_INT16	1
Time of File Generation	14	DFNT_CHAR8	"yyyydddhhmmss"
Type of DCE	4	DFNT_CHAR8	"SCI" or "CAL"

Number Related Files	1	DFNT_INT16	9
Related File 1	21	DFNT_CHAR8	"EO1yyyydddhhmmss.WSR",
Related File 2	21	DFNT_CHAR8	"EO1yyyydddhhmmss.WSZ",
...
Related File n	21	DFNT_CHAR8	"EO1yyyydddhhmmss.M4R"
Level 0 Processing Notes	N	DFNT_CHAR8	N bytes of string data
Cal Pipe Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Cal Pipe Processing Notes	N	DFNT_CHAR8	N bytes of string data

SDS Attributes for Level 1R data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"WV"
Dataset Type	12	DFNT_CHAR8	"Level 1R"
Data Start Time	14	DFNT_CHAR8	"yyyydddhhmmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	105
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for offset coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"WV"
Dataset Type	12	DFNT_CHAR8	"Offset"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	105
Scale factor	1	DFNT_INT16	1000

SDS Attributes for response coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"WV"
Dataset Type	12	DFNT_CHAR8	"Response"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	105
Scale factor	1	DFNT_INT16	1000

4.2.2.4 Data Format

The Level 1R data will be in a three-dimensional array: x in cross track, y along track, and z in the spectral band dimension. The array will consist of images for each band in band-sequential order, and each image will be written in row major format with each row corresponding to the cross track direction. Described heuristically, the data array will consist of all the cross track pixels for a single line and a single band, followed by all the cross track pixels for the next line along track and the same single band, and so on for all lines along track for a single band. This is repeated for each band.

If there are 320 cross track pixels, 500 along track lines, and 105 bands, the (x, y, z) data array will be as follows:

$$\begin{array}{l}
 (1, 1, 1), \dots (320, 1, 1), \\
 (1, 2, 1), \dots (320, 2, 1), \\
 \quad \vdots \qquad \qquad \qquad \quad \vdots \\
 (1,500, 1), \dots (320,500, 1), \\
 (1, 1, 2), \dots (320, 1, 2), \\
 (1, 2, 2), \dots (320, 2, 2), \\
 \quad \vdots \qquad \qquad \qquad \quad \vdots \\
 (1,500,105), \dots (320,500,105)
 \end{array}$$

The dark offset coefficient data will consist of a single coefficient for each cross track pixel for each band. The data will be stored with the cross track pixels in the x dimension. This is repeated for each band.

If there are 320 cross track pixels and 105 bands, both of the coefficient data arrays will be as follows:

$$\begin{array}{l}
 (1, 1), \dots (320, 1), \\
 (1, 2), \dots (320, 2), \\
 \quad \vdots \qquad \qquad \qquad \quad \vdots \\
 (1, 105), \dots (320, 105)
 \end{array}$$

The response coefficient data format is identical to the dark offset coefficient data format.

Each WIS VNIR band has 320 pixels cross track and will have however many pixels along track as are generated by the duration of the DCE. There are 105 bands in the z dimension.

4.2.2.5 Accuracy and Completeness

Data completeness will be as high as possible, with all available data processed. The actual level of data completeness will be identified within the production data file through the specification of byte locations of data fill pattern. The byte locations with missing data will contain fill data 0x5000.

4.2.2.6 Maximum File Size

The data will be recorded from the ALI port at a rate of 225 Hz which corresponds to 15,120,000 pixels per second of data. Assuming a 1 kB header and a 30-second DCE, the total file size including the calibrated data and all of the coefficients will be 4.33 GB for a science DCE.

4.2.2.7 File Access

Data will reside on a GSFC SVDF disk and will be written to tape as described in Section 0 for delivery to LL for Performance Assessment.

4.2.3

WIS SWIR ALI Port Level 1R Radiometrically Calibrated Data File (WSR)

4.2.3.1 Description

This file contains the radiometrically calibrated data generated from the Level 0 file of raw data collected by the WARP from the WIS SWIR ALI port during a DCE. The DCE can be either calibration or science data. The file contains the Level 0 file attributes with some modification, plus additional attributes associated with the radiometric calibration. The output data is stored as one SD file with three SDSs: the 16-bit scaled integer Level 1R calibrated data, the 16-bit floating point dark offset coefficients applied to the Level 0 data, and the 16-bit floating point response coefficients applied to the Level 0 data. To recover the Level 0 data for a pixel, first divide the Level 1R engineering unit value by the response coefficient for that pixel, then add in the dark coefficient for that pixel.

4.2.3.2 Support Duration

GSFC will generate this file when requested through all mission phases. For the first 60 post-launch days of the mission, this file will be delivered to LL by overnight mail. For the remainder of the mission, this file will be delivered to LL within 1 week of generation.

4.2.3.3 Format

Filename: EO1yyyydddhhmmss.WSR

The **yyyydddhhmmss** time will be the start time of the DCE that generated the data present in the file.

File Attributes:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
Filename	21	DFNT_CHAR8	"EO1yyyydddhhmmss.WSR"
Data Product Level	1	DFNT_INT16	1
LZP Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Big (1) or Little (0) Endian	1	DFNT_INT16	1
Time of File Generation	14	DFNT_CHAR8	"yyyydddhhmmss"
Type of DCE	4	DFNT_CHAR8	"SCI" or "CAL"
Number Related Files	1	DFNT_INT16	9

Related File 1	21	DFNT_CHAR8	"EO1yyyydddhhmss.WVR",
Related File 2	21	DFNT_CHAR8	"EO1yyyydddhhmss.WSZ",
...
Related File n	21	DFNT_CHAR8	"EO1yyyydddhhmss.M4R"
Level 0 Processing Notes	N	DFNT_CHAR8	N bytes of string data
Cal Pipe Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Cal Pipe Processing Notes	N	DFNT_CHAR8	N bytes of string data

SDS Attributes for Level 1R data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"WS"
Dataset Type	12	DFNT_CHAR8	"Level 1R"
Data Start Time	14	DFNT_CHAR8	"yyyydddhhmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	210
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for offset coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"WS"
Dataset Type	12	DFNT_CHAR8	"Offset"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	210
Scale factor	1	DFNT_INT16	1000

SDS Attributes for response coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"WS"
Dataset Type	12	DFNT_CHAR8	"Response"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	210
Scale factor	1	DFNT_INT16	1000

4.2.3.4 Data Format

The data will be in a three-dimensional array: x in cross track, y along track, and z in the spectral band dimension. The array will consist of images for each band in band-sequential order, and each image will be written in row major format with each row corresponding to the cross track direction. Described heuristically, the data array will consist of all the cross track pixels for a single line and a single band, followed by all the cross track pixels for the next line along track and the same single band, and so on for all lines along track for a single band. This is repeated for each band.

If there are 320 cross track pixels, 500 along track lines, and 210 bands, the (x, y, z) data array will be as follows:

$$\begin{array}{l}
 (1, 1, 1), \dots (320, 1, 1), \\
 (1, 2, 1), \dots (320, 2, 1), \\
 \quad \vdots \qquad \qquad \qquad \quad \vdots \\
 (1,500, 1), \dots (320,500, 1), \\
 (1, 1, 2), \dots (320, 1, 2), \\
 (1, 2, 2), \dots (320, 2, 2), \\
 \quad \vdots \qquad \qquad \qquad \quad \vdots \\
 (1,500,210), \dots (320,500,210)
 \end{array}$$

The dark offset coefficient data will consist of a single coefficient for each cross track pixel for each band. The data will be stored with the cross track pixels in the x dimension. This is repeated for each band.

If there are 320 cross track pixels and 210 bands, both of the coefficient data arrays will be as follows:

$$\begin{array}{l}
 (1, 1), \dots (320, 1), \\
 (1, 2), \dots (320, 2), \\
 \quad \vdots \qquad \qquad \qquad \quad \vdots \\
 (1, 210), \dots (320, 210)
 \end{array}$$

The response coefficient data format is identical to the dark offset coefficient data format.

Each WIS SWIR band has 320 pixels cross track and will have however many pixels along track as are generated by the duration of the DCE. There are 210 bands in the z dimension.

4.2.3.5 Accuracy and Completeness

Data completeness will be as high as possible, with all available data processed. The actual level of data completeness will be identified within the production data file through the specification of byte locations of data fill pattern. The byte locations with missing data will contain fill data 0x5000.

4.2.3.6 Maximum File Size

The data will be recorded from the ALI port at a rate of 225 Hz which corresponds to 15,120,000 pixels per second of data. Assuming a 1 kB header and a 30-second DCE, the total file size including the calibrated data and all of the coefficients will be 4.33 GB for a science DCE.

4.2.3.7 File Access

Data will reside on A GSFC SVDF disk and will be written to tape as described in Section 0 for delivery to LL for Performance Assessment.

4.2.4

GIS VNIR ALI Port Level 1R Radiometrically Calibrated Data File (GVR)

4.2.4.1 Description

This file contains the radiometrically calibrated data generated from the Level 0 file of raw data collected by the WARP from the GIS VNIR ALI port during a DCE. The DCE can be either calibration or science data. The file contains the Level 0 file attributes with some modification, plus additional attributes associated with the radiometric calibration. The output data is stored as one SD file with three SDSs: the 16-bit scaled integer Level 1R calibrated data, the 16-bit floating point dark offset coefficients applied to the Level 0 data, and the 16-bit floating point response coefficients applied to the Level 0 data. To recover the Level 0 data for a pixel, first divide the Level 1R engineering unit value by the response coefficient for that pixel, then add in the dark coefficient for that pixel.

4.2.4.2 Support Duration

GSFC will generate this file when requested through all mission phases. For the first 60 post-launch days of the mission, this file will be delivered to LL by overnight mail. For the remainder of the mission, this file will be delivered to LL within 1 week of generation.

4.2.4.3 Format

Filename: EO1yyyydddhhmmss.GVR

The **yyyydddhhmmss** time will be the start time of the DCE that generated the data present in the file.

File Attributes:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
Filename	21	DFNT_CHAR8	"EO1yyyydddhhmmss.GVR"
Data Product Level	1	DFNT_INT16	1
LZP Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Big (1) or Little (0) Endian	1	DFNT_INT16	1
Time of File Generation	14	DFNT_CHAR8	"yyyydddhhmmss"
Type of DCE	4	DFNT_CHAR8	"SCI" or "CAL"
Number Related Files	1	DFNT_INT16	9

Related File 1	21	DFNT_CHAR8	"EO1yyyydddhhmss.GVZ",
Related File 2	21	DFNT_CHAR8	"EO1yyyydddhhmss.GSR",
...
Related File n	21	DFNT_CHAR8	"EO1yyyydddhhmss.M4R"
Level 0 Processing Notes	N	DFNT_CHAR8	N bytes of string data
Cal Pipe Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Cal Pipe Processing Notes	N	DFNT_CHAR8	N bytes of string data

SDS Attributes for Level 1R data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"GV"
Dataset Type	12	DFNT_CHAR8	"Level 1R"
Data Start Time	14	DFNT_CHAR8	"yyyydddhhmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	105
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for offset coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"GV"
Dataset Type	12	DFNT_CHAR8	"Offset"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	105
Scale factor	1	DFNT_INT16	1000

SDS Attributes for response coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"GV"
Dataset Type	12	DFNT_CHAR8	"Response"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	105
Scale factor	1	DFNT_INT16	1000

4.2.4.4 Data Format

The data will be in a three-dimensional array: x in cross track, y along track, and z in the spectral band dimension. The array will consist of images for each band in band-sequential order, and each image will be written in row major format with each row corresponding to the cross track direction. Described heuristically, the data array will consist of all the cross track pixels for a single line and a single band, followed by all the cross track pixels for the next line along track and the same single band, and so on for all lines along track for a single band. This is repeated for each band.

If there are 320 cross track pixels, 500 along track lines, and 105 bands, the (x, y, z) data array will be as follows:

$$\begin{array}{l}
 (1, 1, 1), \dots (320, 1, 1), \\
 (1, 2, 1), \dots (320, 2, 1), \\
 \quad \vdots \qquad \qquad \qquad \quad \vdots \\
 (1,500, 1), \dots (320,500, 1), \\
 (1, 1, 2), \dots (320, 1, 2), \\
 (1, 2, 2), \dots (320, 2, 2), \\
 \quad \vdots \qquad \qquad \qquad \quad \vdots \\
 (1,500,105), \dots (320,500,105)
 \end{array}$$

The dark offset coefficient data will consist of a single coefficient for each cross track pixel for each band. The data will be stored with the cross track pixels in the x dimension. This is repeated for each band.

If there are 320 cross track pixels and 105 bands, both of the coefficient data arrays will be as follows:

$$\begin{array}{l}
 (1, 1), \dots (320, 1), \\
 (1, 2), \dots (320, 2), \\
 \quad \vdots \qquad \qquad \qquad \quad \vdots \\
 (1, 105), \dots (320, 105)
 \end{array}$$

The response coefficient data format is identical to the dark offset coefficient data format.

Each WIS VNIR band has 320 pixels cross track and will have however many pixels along track as are generated by the duration of the DCE. There are 105 bands in the z dimension.

4.2.4.5 Accuracy and Completeness

Data completeness will be as high as possible, with all available data processed. The actual level of data completeness will be identified within the production data file through the specification of byte locations of data fill pattern. The byte locations with missing data will contain fill data 0x5000.

4.2.4.6 Maximum File Size

The data will be recorded from the ALI port at a rate of 225 Hz which corresponds to 7,560,000 pixels per second of data. Assuming a 1 kB header and a 30-second DCE, the total file size including the calibrated data and all of the coefficients will be 2.2 GB for a science DCE.

4.2.4.7 File Access

Data will reside on GSFC SVDF disk and will be written to tape as described in Section 0 for delivery to LL for Performance Assessment.

4.2.5

GIS SWIR ALI Port Level 1R Radiometrically Calibrated Data File (GSR)

4.2.5.1 Description

This file contains the radiometrically calibrated data generated from the Level 0 file of raw data collected by the WARP from the GIS SWIR ALI port during a DCE. The DCE can be either calibration or science data. The file contains the Level 0 file attributes with some modification, plus additional attributes associated with the radiometric calibration. The output data is stored as one SD file with three SDSs: the 16-bit scaled integer Level 1R calibrated data, the 16-bit floating point dark offset coefficients applied to the Level 0 data, and the 16-bit floating point response coefficients applied to the Level 0 data. To recover the Level 0 data for a pixel, first divide the Level 1R engineering unit value by the response coefficient for that pixel, then add in the dark coefficient for that pixel.

4.2.5.2 Support Duration

GSFC will generate this file when requested through all mission phases. For the first 60 post-launch days of the mission, this file will be delivered to LL by overnight mail. For the remainder of the mission, this file will be delivered to LL within 1 week of generation.

4.2.5.3 Format

Filename: EO1yyyydddhhmmss.GSR

The **yyyydddhhmmss** time will be the start time of the DCE that generated the data present in the file.

File Attributes:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
Filename	21	DFNT_CHAR8	"EO1yyyydddhhmmss.GSR"
Data Product Level	1	DFNT_INT16	1
LZP Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Big (1) or Little (0) Endian	1	DFNT_INT16	1
Time of File Generation	14	DFNT_CHAR8	"yyyydddhhmmss"
Type of DCE	4	DFNT_CHAR8	"SCI" or "CAL"
Number Related Files	1	DFNT_INT16	9

Related File 1	21	DFNT_CHAR8	"EO1yyyydddhhmss.GSZ",
Related File 2	21	DFNT_CHAR8	"EO1yyyydddhhmss.GVR",
...
Related File n	21	DFNT_CHAR8	"EO1yyyydddhhmss.M4R"
Level 0 Processing Notes	N	DFNT_CHAR8	N bytes of string data
Cal Pipe Software Version	3	DFNT_INT16	1,1,1 (Version 1.1.1)
Cal Pipe Processing Notes	N	DFNT_CHAR8	N bytes of string data

SDS Attributes for Level 1R data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"GS"
Dataset Type	12	DFNT_CHAR8	"Level 1R"
Data Start Time	14	DFNT_CHAR8	"yyyydddhhmss"
Data Duration	9	DFNT_FLOAT32	12.12345 (in seconds)
Number of cross track pixels	1	DFNT_INT16	320
Number of along track pixels	1	DFNT_INT32	6750
Number of bands	1	DFNT_INT16	210
Percent Missing Data	1	DFNT_INT16	11

SDS Attributes for offset coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"GS"
Dataset Type	12	DFNT_CHAR8	"Offset"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	210
Scale factor	1	DFNT_INT16	1000

SDS Attributes for response coefficient data:

<u>Name</u>	<u>Max. Length</u>	<u>HDF Type</u>	<u>Example value</u>
ALI Sensor	4	DFNT_CHAR8	"GS"
Dataset Type	12	DFNT_CHAR8	"Response"
Number of cross track pixels	1	DFNT_INT16	320
Number of bands	1	DFNT_INT16	210
Scale factor	1	DFNT_INT16	1000

4.2.5.4 Data Format

The data will be in a three-dimensional array: x in cross track, y along track, and z in the spectral band dimension. The array will consist of images for each band in band-sequential order, and each image will be written in row major format with each row corresponding to the cross track direction. Described heuristically, the data array will consist of all the cross track pixels for a single line and a single band, followed by all the cross track pixels for the next line along track and the same single band, and so on for all lines along track for a single band. This is repeated for each band.

If there are 320 cross track pixels, 500 along track lines, and 210 bands, the (x, y, z) data array will be as follows:

```
( 1, 1, 1),.....(320, 1, 1),
( 1, 2, 1),.....(320, 2, 1),
  ⋮
( 1,500, 1),.....(320,500, 1),
( 1, 1, 2),.....(320, 1, 2),
( 1, 2, 2),.....(320, 2, 2),
  ⋮
( 1,500,210),.....(320,500,210)
```

The dark offset coefficient data will consist of a single coefficient for each cross track pixel for each band. The data will be stored with the cross track pixels in the x dimension. This is repeated for each band.

If there are 320 cross track pixels and 210 bands, both of the coefficient data arrays will be as follows:

```
( 1, 1),.....(320, 1),
( 1, 2),.....(320, 2),
  ⋮
( 1, 210),.....(320, 210)
```

The response coefficient data format is identical to the dark offset coefficient data format.

Each WIS SWIR band has 320 pixels cross track and will have however many pixels along track as are generated by the duration of the DCE. There are 210 bands in the z dimension.

4.2.5.5 Accuracy and Completeness

Data completeness will be as high as possible, with all available data processed. The actual level of data completeness will be identified within the production data file through the specification of byte locations of data fill pattern. The byte locations with missing data will contain fill data 0x5000.

4.2.5.6 Maximum File Size

The data will be recorded from the ALI port at a rate of 225 Hz which corresponds to 7,560,000 pixels per second of data. Assuming a 1 kB header and a 30-second DCE, the total file size including the calibrated data and all of the coefficients will be 2.2 GB for a science DCE.

4.2.5.7 File Access

Data will reside on a GSFC SVDF disk and will be written to tape as described in Section 0 for delivery to LL for Performance Assessment.

4.2.6 Calibration Pipeline Processing Log File (PLR)

4.2.6.1 Description

This file contains the processing log generated by the Radiometric Calibration Pipeline for a single DCE. It combines all processing notes for each science data port in a single file.

4.2.6.2 Support Duration

GSFC will generate this file when requested through all mission phases. For the first 60 post-launch days of the mission, this file will be delivered to LL by overnight mail. For the remainder of the mission, this file will be delivered to LL within 1 week of generation.

4.2.6.3 Format

Filename: EO1yyyydddhhmmss.PLR

The **yyyydddhhmmss** time will be the start time of the DCE that generated the data present in the file.

Format: All information will be stored as ASCII text.

4.2.6.4 Accuracy and Completeness

The data in the file shall always be accurate and complete.

4.2.6.5 Maximum File Size

This file should be less than 10 kB.

4.2.6.6 File Access

Data will reside on a GSFC SVDF disk and will be written to tape as described in Section 0 for delivery to LL for Performance Assessment.

4.3 Non-Calibration Pipeline Data Files

The following subsections individually describe the data files necessary for accurate Performance Assessment that are neither an input nor an output of the Radiometric Calibration Pipeline. These files will be written to tape for use by LL for Performance Assessment. Also detailed below is a tape contents file, which specifies which data files are being delivered on a given tape.

4.3.1 Atmospheric Corrector Files (ACZ)

4.3.1.1 Description

This file contains the raw data collected by the WARP from the Atmospheric Corrector (AC) instrument during a DCE.

4.3.1.2 Support Duration

GSFC will generate this file through all mission phases. For the first 60 post-launch days of the mission, this file will be delivered to LL by overnight mail. For the remainder of the mission, this file will be delivered to LL within 1 week of generation.

4.3.1.3 Format

Filename: EO1yyyydddhhmmss.ACZ

The **yyyydddhhmmss** time will be the start time of the DCE generating the AC data present in the file.

Attributes and data format are TBD

4.3.1.4 Accuracy and Completeness

Data completeness will be as high as possible, with all available data processed.

4.3.1.5 Maximum File Size

Volume is a function of the data format, which will be defined in the header.

4.3.2 Non-DCE Housekeeping File (NHZ)

4.3.2.1 Description

This file contains the housekeeping telemetry data collected by the EO-1 spacecraft's command processor between DCEs and during real-time ground station contacts.

4.3.2.2 Support Duration

GSFC will generate this file through all mission phases. Multiple non-DCE housekeeping files can be saved and written to a single tape. This tape will be delivered to LL within one week of generation of the oldest file. Non-DCE housekeeping files not yet delivered by tape will be available electronically by ftp to LL in the event immediate assistance or analysis is needed. The necessary pathname and access code will be defined at the time of such an event.

4.3.2.3 Format

Filename: EO1yyyydddhhmmss.NHZ

The **yyyydddhhmmss** time will be the start time of the download of the data during the ground station contact.

File Format: The housekeeping data will be in the standard ASIST-compatible SFDU format as defined in Reference [TBD].

4.3.2.4 Accuracy and Completeness

Data completeness will be as high as possible.

4.3.2.5 Maximum File Size

[TBD]

4.3.3

Ground Processing Data Files (GPZ)

4.3.3.1 Description

This file may never exist. If this file exists, this file contains the improved EO-1 spacecraft attitude and ephemeris data generated by GSFC ground processing. This data is generated from the attitude and ephemeris data downloaded in the DCE housekeeping file.

4.3.3.2 Support Duration

GSFC will generate this file through all mission phases if any improved spacecraft attitude and ephemeris data exists. For the first 60 post-launch days of the mission, this file will be delivered to LL by overnight mail. For the remainder of the mission, this file will be delivered to LL within 1 week of generation.

4.3.3.3 Format

Filename: EO1yyyydddhhmmss.GPZ

The **yyyydddhhmmss** time will be the start time of the DCE for which the ground processing data was generated.

Attributes and data format details will be determined if this data exists.

4.3.4 Tape Contents File (TCZ)

4.3.4.1 Description

This file contains a list of the files archived to tape. The tape contents file will appear first in the list and will be the first file in the tar file.

4.3.4.2 Support Duration

GSFC will generate this file through all mission phases. For the first 60 post-launch days of the mission, this file will be delivered to LL by overnight mail. For the remainder of the mission, this file will be delivered to LL within 1 week of generation.

4.3.4.3 Format

Filename: 0EO1#####.TCR

The ##### is the tape number. The leading 0 is to ensure that the file appears first in directory listings and tar files.

Format: All information will be stored as ASCII text in the following format and according to the following example:

```
Number of files: 9
0EO1#####.TCR
EO1yyyyddhhmmss.GVZ
EO1yyyyddhhmmss.GSZ
EO1yyyyddhhmmss.GPZ
EO1yyyyddhhmmss.DHZ
EO1yyyyddhhmmss.M1Z
EO1yyyyddhhmmss.GVR
EO1yyyyddhhmmss.GSR
EO1yyyyddhhmmss.M1R
```

The integer specified in the **Number of files:** line will be a single number between 2 and 16.

4.3.4.4 Accuracy and Completeness

The data in the file shall always be accurate and complete.

4.3.4.5 Maximum File Size

Given that a maximum of 16 filenames will be on a single tape, this file should be less than 1 kB.

4.3.4.6 File Access

Data is transferred on DLT-compatible tape cartridge as described in Section 0 for LL Performance Assessment. A paper print out of this file will be sent with each Level 1R tape.

Appendix A

Variable Types

C	IDL	HDF
int	INT	DFNT_INT16
long	LONG	DFNT_INT32
float	FLOAT	DFNT_FLOAT32
char	BYTE	DFNT_CHAR88
string[]	STRING	DFNT_CHAR88

Abbreviations and Acronyms

AC	Atmospheric Corrector
ALI	Advanced Land Imager
API	application programming interface
ASCII	American Standard Code for Information Interchange
DCE	data collection event
DLT	digital linear tape
EO-1	Earth Observer-1
GB	gigabyte
GIS	Grating Imaging Spectrometer
GSFC	Goddard Space Flight Center
HDF	Hierarchical Data Format
Hz	hertz
ICD	interface control document
IDL	Interactive Data Language
kB	kilobyte
LL	Lincoln Laboratory
LSB	least significant bit
LZP	Level Zero Processing
MB	megabyte
MIT	Massachusetts Institute of Technology
MS	multispectral
MSB	most significant bit
NASA	National Aeronautics and Space Administration
NCSA	National Center for Supercomputing Applications
PAN	panchromatic
SD	scientific data
SDS	scientific data set
SFDU	standard formatted data unit

SVDF	Science Validation Data Facility
SWIR	shortwave infrared
TBD	to be determined
VNIR	visible/near infrared
WARP	Wideband Advanced Recorder/Processor
WIS	Wedge Imaging Spectrometer

Date: Mon, 05 Oct 1998 11:21:14 -0400 (Eastern Daylight Time)
From: Administrator <administrator@hst-nic.hst.nasa.gov>
Reply-to: (Jenifer Evans)
Subject: CCR:0019 - DUE: 09/11/98 ROUTINE Level-2 Jenifer Evan WWW-COMMENTS

USER : (Jenifer Evans) sent the following comments on :

Date: 10/05/98
CCR Number: 0019
Sponsor: Leslie Moy/EO-1Code 923
Due Date: 09/11/98

CCR Title: Rev A TO ICD-55 RADIOMETRIC PROC & PERFORMANCE

Remote host: 129.55.200.20 Email Address: jenifer@ll.mit.edu

APPROVAL STATUS: APPROVED WITH COMMENTS

Note:

COMMENTS: Figures 1-1, 4-1, 4-2 are floating over the text and misplaced. This should be corrected.

All references to figures seem to cause a "Error! Style not defined.-Error! Bookmark not defined" message. This should be corrected.

All references to sections now include the section title. For example, in section 4 Data Product Definitions, The first paragraph refers to "Section 4.1 Level 0 Data Products" as opposed to just referring to "Section 4.1." I have no objection to this change, I just mentioned it in case it was unintentional.

As a minor style issue, many sections have the section number at the end of one page with the new section title and new section starting on the next page. For example,
4.1.2.7 File Access
(blah, blah, blah)

4.1.3
(new page)
WIS VNIR...

Date: Tue, 06 Oct 1998 16:34:30 -0400 (Eastern Daylight Time)
From: Administrator <administrator@hst-nic.hst.nasa.gov>
Reply-to: (Nicholas Speciale)
Subject: CCR:0019 - DUE: 09/11/98 ROUTINE Level-2 Nicholas Special WWW-COMMENTS

USER : (Nicholas Speciale) sent the following comments on :

Date: 10/6/98

CCR Number: 0019

Sponsor: Leslie Moy/EO-1Code 923

Due Date: 09/11/98

CCR Title: Rev A TO ICD-55 RADIOMETRIC PROC & PERFORMANCE

Remote host: 128.183.212.178 Email Address: speciale@pop500.gsfc.nasa.gov

APPROVAL STATUS: DISAPPROVED

Note:

COMMENTS: Since the ALI (WIS and GIS) are no longer part of the EO-1 Mission they should be deleted from this document entirely rather than confusing developers. Effort should be made to strike out references to WIS and GIS

EO-1 CCR SPONSOR RECOMMENDATION FORM

CCR NUMBER: 0019

CCR TITLE: Revision A to Radiometric Calibration Processing and Performance ICD-55

CCR SPONSOR: Leslie Moy/GSFC

COMMENTS RECEIVED:

Jenifer Evans: **Approve with comments:**

1) Figures 1-1, 4-1 and 4-2 are floating over the text and misplaced. This should be corrected.

Sponsor Response:

I agree. Tech Pubs to correct when baselining.

2) All references to figures seem to cause a "Error! Style not defined.-Error! Bookmark not defined" message. This should be corrected.

Sponsor Response:

I agree. I agree. Tech Pubs to correct when baselining.

3)All references to sections now include the section title. For example, in section 4 Data Product Definitions, the first paragraph refers to "Section 4.1 Level 0 Data Products" as opposed to just referring to "Section 4.1." I have no objection to this change, I just mentioned it in case it was unintentional.

Sponsor Response:

As long as the references are uniform, I don't have an opinion.

4)As a minor style issue, many sections have the section number at the end of one page with the new section title and new section starting on the next page. For example, 4.1.2.7 File Access, (blah, blah, blah) 4.1.3 (new page) WIS VNIR. . .

Sponsor Response:

I agree. But it has no real impact on the document or the data.

Nicholas Speciale: **Disapproved.** Since the ALI (WIS and GIS) are no longer part of the EO-1 Mission they should be deleted from this document entirely rather than confusing developers. Effort should be made to strike out references to WIS and GIS.

Sponsor Response:

I disagree. This version was to replace the previously mis-labeled baselined ICD in a quick time frame. The baseline was written last fall when the WIS and GIS were still possibilities. We plan to delete these references in the first update with a submittal of a CCR. Also, the wording referring to the WIS and GIS is that **IF** they exist, the format should be given accordingly. I would like to quickly get this version approved and then work on the Updates. It worries me we don't have a baseline yet.

SPONSOR RECOMMENDATION: (Make changes to document where indicated, reference Sponsor Comments for changes to be implemented.)

Approve X Approve with Change _____ Disapprove _____

SPONSOR/ORGANIZATION: Leslie Moy

DATE: October 7, 1998

